

 **YORK**[®]
INSTALL CONFIDENCE



MULTI SPLIT INVERTER 50HZ R-410A

YU2E14/18 YU3E27

YU4E28/36 YU5E42

MULTI SPLIT INVERTER 50HZ R-410A

Condensing Unit

- High efficiency compressor
- Compact design
- Quiet running mode
- Easy maintenance
- Valve protection cover




Remote/Wired Controller

- Clock function
- Sleep mode
- Multi-speed fan
- 24-hour timer setting



Indoor Unit - High Wall

- Hidden display
- Follow me
- Auto Random Restart
- Mute Operation
- 2-Way Drainage
- Wired controller (option)
- Wifi control (option)

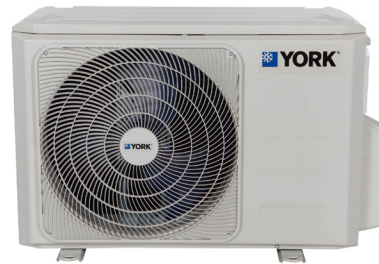

Indoor Unit - Cassette

- 360° Air outlet
- Fresh air inlet
- Built-in drain pump
- Auto Random Restart
- Super slim design
- Follow me
- Wired controller (option)
- Wifi control (option)

Indoor Unit - Slim duct

- Auto Random Restart
- 2-way Drainage
- Easy maintenance
- High velocity air flow
- Built-in drain pump (Option)
- Wifi control (option)



The YORK® line of Multi Splits Air Conditioners includes a wide range of sizes to give you more flexibility in your product offering. Each model is designed to provide comfort and efficiency in an easy-to-operate unit and the sleek design fits a variety of spaces, whether it's in a home or office. Models meet the highest energy efficiency ratings, so less energy is consumed without sacrificing comfort and performance. Both the condensing unit and indoor unit are engineered for quiet operation. And comfort control settings are easily changed with the touch of a button on the remote control.

MULTI SPLIT INVERTER 50HZ R-410A

Features and Benefits



24-Hour Timer

Allows programmed start times up to 24 hours in advance for flexible and more convenient operation.



Super Quiet

Technology and compact design reduce noise level to as low as 25 decibels for a super quiet and comfortable user experience.



Auto Random Restart

Unit is automatically randomly returned to previous operating conditions after a power outage, for simplified operation.



Self Diagnosis

Clearly displayed failure codes allow for quicker troubleshooting and easier maintenance.



Multi-Speed Fan

Multi-speed fan helps satisfy various airflow requirements.



R-410A

Environment-friendly refrigerant cools and heats more efficiently without destroying the ozone layer.



3-Minute Protection

A 3-minute delay before the compressor will restart helps avoid compressor damage and work time.



Golden Fin

The unique anti-corrosive golden coating on aluminum fin of all the heat exchangers can withstand the salty air, rain and other corrosive elements. It also effectively prevents bacteria from breeding and improves heat efficiency.

MULTI SPLIT INVERTER 50HZ R-410A

High Wall Indoor

Indoor Model			YHSE09XEEMH-RX	YHSE12XEEMH-RX	YHSE18XEEMH-RX	YHSE24XEEMH-RX
Power supply		V,Hz,Ph	220-240V , 50Hz , 1Ph	220-240V , 50Hz , 1Ph	220-240V , 50Hz , 1Ph	220-240V , 50Hz , 1Ph
Cooling	Capacity	Btu/h	9,200	12,000	18,000	25,000
	Input	W	18	21	24	35
	Rated current	A	0.1	0.11	0.11	0.15
Heating	Capacity	Btu/h	10,000	13,000	19,000	26,000
	Input	W	18	21	24	35
	Rated current	A	0.10	0.11	0.11	0.15
Indoor fan motor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Capacitor	uF	-	-	-	-
	Speed(Hi/Mi/Lo)	rpm	1,050/850/650	1,100/1,000/700	1,100/800/700	1,100/900/700
Indoor air flow (Hi/Mi/Lo)		m ³ /h	521/429/259	539/478/294	750/505/420	1,050/750/560
Indoor sound pressure level(Hi/Mi/Lo)		dB(A)	33/22/20	32/22/21	33/27/21	40/30/26
Indoor sound power level		dB(A)	54	56	58	62
Indoor unit	Dimension (WxDxH)	mm	722x187x290	802x189x297	965x215x319	1,080x226x335
	Packing (WxDxH)	mm	790x270x370	875x285x375	1,045x305x405	1,155x415x315
	Net/Gross weight	kg	7.3/9.7	8.2/10.7	9/12.2	12/15.2
	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ12.7(1/4"/1/2")	Φ9.52/Φ15.9(3/8"/5/8")
Controller		Standard	Remote Control	Remote Control	Remote Control	Remote Control
Setting temperature range		°C	17-30	17-30	17-30	17-30

Compact Cassette Indoor

Indoor Model			YTSE07XEEMH-RX	YTSE09XEEMH-RX	YTSE12XEEMH-RX	YTSE18XEEMH-RX
Power supply		V,Hz,Ph	220-240V , 50Hz , 1Ph	220-240V , 50Hz , 1Ph	220-240V , 50Hz , 1Ph	220-240V , 50Hz , 1Ph
Cooling	Capacity	Btu/h	7,000	9,000	12,000	18,000
	Input	W	40	40	40	102
	Rated current	A	0.18	0.18	0.18	0.44
Heating	Capacity	Btu/h	8,000	10,000	14,000	18,500
	Input	W	40	40	40	102
	Rated current	A	0.18	0.18	0.18	0.44
Indoor fan motor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Capacitor	uF	-	-	-	-
	Speed(hi/mi/lo)	rpm	600/520/460	600/520/460	700/580/500	720/625/540
Indoor air flow		m ³ /h	580/500/450	580/500/450	617/504/415	680/560/500
Indoor sound pressure level		dB(A)	38/33/29	38/33/29	41/37/34	44/42/41
Indoor sound power level		dB(A)	53	53	58	56
Indoor unit	Dimension (WxDxH)(body)	mm	570x570x260	570x570x260	570x570x260	570x570x260
	Packing(WxDxH)(body)	mm	662x662x317	662x662x317	662x662x317	662x662x317
	Dimension(WxDxH)(panel)	mm	647x647x50	647x647x50	647x647x50	647x647x50
	Packing(WxDxH)(panel)	mm	715x715x123	715x715x123	715x715x123	715x715x123
	Net/Gross weight(body)	kg	14.5/17.3	14.5/17.3	16.1/18.9	16.2/21.4
	Net/Gross weight(panel)	kg	2.5/4.5	2.5/4.5	2.5/4.5	2.5/4.5
Drainage water pipe dia.		mm	ODΦ25	ODΦ25	ODΦ25	ODΦ25
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ12.7(1/4"/1/2")
Controller		Standard	Remote control	Remote control	Remote control	Remote control
Setting temperature range		°C	17-30	17-30	17-30	17-30

MULTI SPLIT INVERTER 50HZ R-410A

Duct Indoor

Indoor Model			YASE07XEEMBH-WX	YASE09XEEMBH-WX	YASE12XEEMBH-WX	YESE18XEEMBH-WX
Power supply		V,Hz,Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling	Capacity	Btu/h	7,000	9,000	12,000	18,000
	Input	W	170	180	185	200
	Rated current	A	1.0	1.1	1.1	1.3
Heating	Capacity	Btu/h	8,000	10,000	13,000	19,000
	Input	W	170	180	185	200
	Rated current	A	1.0	1.1	1.1	1.3
Indoor fan motor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Speed(Hi/Med/Lo)	rpm	1,170/1,030/850	1,170/1,030/850	1,170/1,030/850	1,650/1,300/1,000
Indoor air flow		m ³ /h	500/340/230	500/340/230	600/480/300	880/650/350
ESP	Rated	Pa	25	25	25	25
	Range	Pa	0-40	0-40	0-60	0-100
Indoor sound pressure level		dB(A)	40/34/27	40/34/27	40/34.5/27.5	41.5/38/33
Indoor sound power level		dB(A)	57	58	59	59
Indoor unit	Dimension (WxDxH)	mm	700x450x200	700x450x200	700x450x200	880x674x210
	Packing(WxDxH)	mm	860x540x275	860x540x275	860x540x275	1070x725x280
	Net/Gross weight	kg	18/22	18/22	18/22	24.3/29.6
Drainage water pipe diameter		mm	ODΦ25	ODΦ25	ODΦ25	ODΦ25
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ12.7(1/4"/1/2")
Controller		Standard	Wired control	Wired control	Wired Control	Wired Control
Setting temperature range		°C	17-30	17-30	17-30	17-30

MULTI SPLIT INVERTER 50HZ R-410A

Outdoor with High Wall Indoor

Outdoor Model			YU2E14YEEBMHO-X		YU2E18YEEBMHO-X		YU3E27YEEBMHO-X		
Indoor unit combination			1 to 1	1 to 2 x 9K	1 to 1	1 to 2 x 9K	1 to 1	1 to 2	1 to 3 x 9K
Power supply		V,Hz,Ph	220-240V, 50Hz, 1Ph		220-240V, 50Hz, 1Ph		220-240V, 50Hz, 1Ph		
Cooling	Capacity	Btu/h	7,000-14,000	1,4000	7,000-18,000	18,000	7,000-18,000	14,000-26,000	27,000
	Input	W	700-1,350	1,300	650-1,600	1,750	750-1,700	1,400-2,350	2,470
	Rated current	A	3.0-5.9	5.9	2.8-7.0	7.6	3.3-7.4	6.1-10.2	10.7
	EER	W/W	/	3.16	/	3.01	/	/	3.20
Heating	Capacity	Btu/h	7,500-15,000	15,000	7,000-19,000	19,000	8,000-20,000	16,000-28,000	28,000
	Input	W	620-1,200	1,100	542-1,596	1,500	720-1,750	1,520-2,174	2,273
	Rated current	A	2.7-5.6	5.15	2.3-6.9	6.7	3.2-7.7	6.6-9.5	9.8
	COP	W/W	/	4.00	/	3.71	/	/	3.61
Seasonal Cooling	SEER	W/W	6.8		6.3		6.6		
	Energy Efficiency Class		A++		A++		A++		
Heating (Average)	SCOP	W/W	4.0		4.0		4.0		
	Energy Efficiency Class		A+		A+		A+		
Max. input consumption		W	2,650		2,300		3,300		
Max. input current		A	11		12		16		
Compressor	Type		ROTARY		ROTARY		ROTARY		
	Rated current(RLA)	A	7.50		7.32		6.95		
	Locked rotor Amp(LRA)	A	-		-		-		
	Thermal protector position		INTERNAL		INTERNAL		INTERNAL		
	Refrigerant oil	ml	ESTER OIL VG74/440		ESTER OIL VG74/450		ESTER OIL VG74/670		
Outdoor fan motor	Type		DC Inverter		DC Inverter		DC Inverter		
	Qty	pcs	1		1		1		
	Output	W	40		40		50		
	Capacitor	µF	-		-		-		
	Speed	rpm	810		810		750		
Outdoor air flow		m3/h	2,000		2,000		3,000		
Indoor sound power level		dB(A)	54		54		54		
Outdoor sound pressure level		dB(A)	54		56.5		59.5		
Outdoor sound power level		dB(A)	64		65		69		
Throttle type			Capillary+EXV		Capillary+EXV		Capillary+EXV		
Outdoor unit	Dimension(WxDxH)	mm	800x333x554		800x333x554		845x363x702		
	Packing(WxDxH)	mm	920x390x615		920x390x615		965x395x765		
	Net/Gross weight	kg	31.5/34.5		37.5/40.5		52.7/56.1		
Refrigerant	Type		R-410A		R-410A		R-410A		
	GWP		2,088		2,088		2,088		
	Charged quantity	kg	1.25		1.70		2.10		
Refrigerant piping	Liquid side/ Gas side	mm(inch)	2 sets Φ6.35/Φ9.52(1/4"/3/8")		2 sets Φ6.35/Φ9.52(1/4"/3/8")		3 sets Φ6.35/Φ9.52(1/4"/3/8")		
	Max. length for all rooms	m	40		40		60		
	Max. length for one indoor unit	m	25		25		30		
	Max. height difference between indoor and outdoor unit	m	15		15		15		
	Max. height difference between indoor units	m	10		10		10		
Ambient temperature	Cooling/Heating	°C	-15-50/-15-24		-15-50/-15-24		-15-50/-15-24		

Remarks: 1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in hemi-anechoic rooms.

MULTI SPLIT INVERTER 50HZ R-410A

YU4E28YEEMHO-X				YU4E36YEEMHO-X				YU5E42YEEMHO-X				
1 to 1	1 to 2	1 to 3	1 to 4 x 9K	1 to 1	1 to 2	1 to 3	1 to 4 x 9K	1 to 1	1 to 2	1 to 3	1 to 4	1 to 5 x 9K
220-240V- 50Hz, 1Ph				220-240V, 50Hz, 1Ph				220-240V, 50Hz, 1Ph				
5,000-15,000	12,000-21,000	18,000-24,000	28,000	7,000-18,000	14,000-26,000	21,000-36,000	36,000	7,000-18,000	14,000-28,000	21000-36000	28,000-40,000	42,000
1,334-1,784	1,730-2,403	2,234-2,777	2,273	1250-1700	1650-2320	2150-3520	3800	680-1,800	1,400-2,780	2,100-3,450	2,700-3,700	3,822
5.8-7.8	7.5-10.7	9.7-12.1	9.9	5.4-7.4	7.2-10.1	9.3-15.3	16.9	3.0-8.0	6.2-11.8	9.0-15.0	11.6-16.0	16.6
/	/	/	3.61	/	/	/	2.78	/	/	/	/	3.22
5,000-15,000	12,000-21,000	18,000-27,000	30,000	7,000-20,000	16,000-29,000	24,000-38,000	38,000	7,000-18,000	14,000-28,000	21,000-36,000	28,000-40,000	42,000
1,656-2,520	2,131-3,419	2,959-3,515	2,435	1,375-2,440	2050-3340	2,880-3,360	3,000	680-1,800	1,400-2,680	1,995-3,330	2,580-3,570	3372
7.2-11.0	9.3-14.9	12.9-15.3	10.6	5.9-10.6	8.9-14.5	12.5-14.6	13	3.0-8.0	6.2-11.3	8.5-14.5	11.1-15.8	14.7
/	/	/	3.61	/	/	/	3.71	/	/	/	/	3.65
6.8				7.1				7.6				
A++				A++				A++				
4				3.8				3.8				
A+				A				A				
3500				4600				4700				
17				21.5				22				
ROTARY				ROTARY				ROTARY				
6.95				5.10				5.10				
-				-				-				
INTERNAL				INTERNAL				INTERNAL				
ESTER OIL VG74/670				ESTER OIL VG74/1,000				ESTER OIL VG74/1,000				
DC Inverter				DC Inverter				DC Inverter				
1				1				1				
120				120				120				
-				-				-				
800				900				900				
3,800				3,800				3,800				
54				54				54				
60				63.5				62				
67				69				69				
Capillary+EXV				Capillary+EXV				Capillary+EXV				
946x410x810				946x410x810				946x410x810				
1,090x500x875				1,090x500x875				1,090x500x875				
67.6/73.4				70/75				76/81				
R-410A				R-410A				R-410A				
2,088				2,088				2,088				
2.40				3.00				3.60				
3 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				3 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				4 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				
80				80				80				
35				35				35				
15				15				15				
10				10				10				
-15-50/-15-24				-15-50/-15-24				-15-50/-15-24				

MULTI SPLIT INVERTER 50HZ R-410A

Outdoor with Compact Cassette Indoor

Outdoor Model			YU2E14YEEBMHO-X		YU2E18YEEBMHO-X		YU3E27YEEBMHO-X		
Indoor unit combination			1 to 1	1 to 2 x 9K	1 to 1	1 to 2 x 9K	1 to 1	1 to 2	1 to 3 x 9K
Power supply		V,Hz,Ph	220-240V, 50Hz, 1Ph		220-240V, 50Hz, 1Ph		220-240V, 50Hz, 1Ph		
Cooling	Capacity	Btu/h	7,000-1,4000	14,000	7,000-18,000	18,000	7,000-18,000	14,000-26,000	27,000
	Input	W	700-1,350	1,340	650-1,600	1,750	750-1,700	1,400-2,350	2,628
	Rated current	A	3.0-5.9	5.9	2.8-7.0	7.6	3.3-7.4	6.1-10.2	11.4
	EER	W/W	/	3.06	/	3.01	/	/	3.01
Heating	Capacity	Btu/h	7,500-15,000	15,000	7,000-19,000	19,000	8,000-20,000	16,000-28,000	28,000
	Input	W	620-1,200	1,100	542-1,596	1,544	720-1,750	1,520-2,174	2,406
	Rated current	A	2.7-5.6	5.15	2.3-6.9	6.7	3.2-7.7	6.6-9.5	10.4
	COP	W/W	/	4.00	/	3.61	/	/	3.41
Seasonal Cooling	SEER	W/W	6.1		6.0		5.8		
	Energy Efficiency Class		A++		A+		A+		
Heating (Average)	SCOP	W/W	3.8		3.8		4.0		
	Energy Efficiency Class		A		A		A+		
Max. input consumption		W	2,650		2,300		3,300		
Max. input current		A	11		12		16		
Compressor	Type		ROTARY		ROTARY		ROTARY		
	Rated current(RLA)	A	7.5		7.32		6.95		
	Locked rotor Amp(LRA)	A	—		—		—		
	Thermal protector position		INTERNAL		INTERNAL		INTERNAL		
	Refrigerant oil	ml	ESTER OIL VG74/440		ESTER OIL VG74/450		ESTER OIL VG74/670		
Outdoor fan motor	Type		DC Inverter		DC Inverter		DC Inverter		
	Qty		1		1		1		
	Output	W	40		40		50		
	Capacitor	µF	—		—		—		
	Speed	rpm	810		810		750		
Outdoor air flow		m ³ /h	2,000		2,000		3,000		
Indoor sound power level		dB(A)	53		53		53		
Outdoor sound pressure level		dB(A)	54		56.5		59.5		
Outdoor sound power level		dB(A)	64		65		69		
Throttle type			Capillary+EXV		Capillary+EXV		Capillary+EXV		
Outdoor unit	Dimension(WxDxH)	mm	800x333x554		800x333x554		845x363x702		
	Packing(WxDxH)	mm	920x390x615		920x390x615		965x395x765		
	Net/Gross weight	kg	31.5/34.5		37.5/40.5		52.7/56.1		
Refrigerant	Type		R-410A		R-410A		R-410A		
	GWP		2,088		2,088		2,088		
	Charged quantity	kg	1.25		1.70		2.10		
Refrigerant piping	Liquid side/ Gas side	mm(inch)	2 sets Φ6.35/Φ9.52(1/4"/3/8")		2 sets Φ6.35/Φ9.52(1/4"/3/8")		3 sets Φ6.35/Φ9.52(1/4"/3/8")		
	Max. length for all rooms	m	40		40		60		
	Max. length for one indoor unit	m	25		25		30		
	Max. height difference between indoor and outdoor unit	m	15		15		15		
	Max. height difference between indoor units	m	10		10		10		
Ambient temperature	Cooling/Heating	°C	-15-50/-15-24		-15-50/-15-24		-15-50/-15-24		

Remarks: 1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in hemi-anechoic rooms.

MULTI SPLIT INVERTER 50HZ R-410A

YU4E28YEEMHO-X				YU4E36YEEMHO-X				YU5E42YEEMHO-X				
1 to 1	1 to 2	1 to 3	1 to 4 x 9K	1 to 1	1 to 2	1 to 3	1 to 4 x 9K	1 to 1	1 to 2	1 to 3	1 to 4	1 to 5 x 9K
220-240V, 50Hz, 1Ph				220-240V, 50Hz, 1Ph				220-240V, 50Hz, 1Ph				
5,000-15,000	12,000-21,000	18,000-24,000	28,000	7,000-18,000	14,000-26,000	21,000-36,000	36,000	7,000-18,000	14,000-28,000	21,000-36,000	28,000-40,000	42,000
1,334-1,784	1,730-2,403	2,234-2,777	2,556	1,250-1,700	1,650-2,320	2,150-3,520	4,050	680-1800	1,400-2,780	2,100-3,450	2,700-3,700	4500
5.8-7.8	7.5-10.7	9.7-12.1	11.1	5.4-7.4	7.2-10.1	9.3-15.3	17.6	3.0-8.0	6.2-11.8	9.0-15.0	11.6-16.0	19.6
/	/	/	3.21	/	/	/	2.61	/	/	/	/	2.74
5,000-15,000	12,000-21,000	18,000-27,000	30,000	7,000-20,000	16,000-29,000	24,000-38,000	38,000	7000-18000	14,000-28,000	21,000-36,000	28,000-40,000	42,000
1,656-2,520	2,131-3,419	2,959-3,515	2,435	1,375-2,440	2,050-3,340	2,880-3,360	3,266	680-1,800	1,400-2,680	1,995-3,330	2580-3,570	3,609
7.2-11.0	9.3-14.9	12.9-15.3	10.6	5.9-10.6	8.9-14.5	12.5-14.6	13.9	3.0-8.0	6.2-11.3	8.5-14.5	11.1-15.8	15.6
/	/	/	3.61	/	/	/	3.41	/	/	/	/	3.41
6.1				5.9				5.6				
A++				A+				A+				
4.0				3.8				3.8				
A+				A				A				
3,500				4,600				4,700				
17				21.5				22				
ROTARY				ROTARY				ROTARY				
6.95				5.1				5.1				
-				-				-				
INTERNAL				INTERNAL				INTERNAL				
ESTER OIL VG74/670				ESTER OIL VG74/1,000				ESTER OIL VG74/1,000				
DC Inverter				DC Inverter				DC Inverter				
1				1				1				
120				120				120				
-				-				-				
800				900				900				
3,800				3,800				3,800				
53				53				53				
59.5				63.5				61.5				
67				69				70				
Capillary+EXV				Capillary+EXV				Capillary+EXV				
946x410x810				946x410x810				946x410x810				
1090x500x875				1090x500x875				1090x500x875				
67.6/73.4				70/75				76/81				
R-410A				R-410A				R-410A				
2,088				2,088				2,088				
2.40				3.00				3.60				
3 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				3 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				4 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				
80				80				80				
35				35				35				
15				15				15				
10				10				10				
-15-50/-15-24				-15-50/-15-24				-15-50/-15-24				

MULTI SPLIT INVERTER 50HZ R-410A

Outdoor with Duct Indoor

Outdoor Model			YU2E14YEEBMHO-X		YU2E18YEEBMHO-X		YU3E27YEEBMHO-X		
Indoor unit combination			1 to 1	1 to 2 x 9K	1 to 1	1 to 2 x 9K	1 to 1	1 to 2	1 to 3 x 9K
Power supply		V,Hz,Ph	220-240V, 50Hz, 1Ph		220-240V, 50Hz, 1Ph		220-240V, 50Hz, 1Ph		
Cooling	Capacity	Btu/h	7,000-14,000	14,000	7,000-18,000	18,000	7,000-18,000	14,000-26,000	27,000
	Input	W	700-1,350	1,240	650-1,600	1,700	750-1,700	1,400-2,350	2,630
	Rated current	A	3.0-5.9	6.4	2.8-7.0	8.0	3.3-7.4	6.1-10.2	11.8
	EER	W/W	/	3.31	/	3.10	/	/	3.01
Heating	Capacity	Btu/h	7,500-15,000	15,000	7,000-19,000	20,000	8,000-20,000	16,000-28,000	28000
	Input	W	620-1,200	1,100	542-1,596	1,465	720-1,750	1,520-2,174	2160
	Rated current	A	2.7-5.6	5.15	2.3-6.9	6.5	3.2-7.7	6.6-9.5	9.6
	COP	W/W	/	4.00	/	4.00	/	/	3.80
Seasonal Cooling	SEER	W/W	6.1		6.1		6.1		
	Energy Efficiency Class		A++		A++		A++		
Heating (Average)	SCOP	W/W	3.8		3.8		3.8		
	Energy Efficiency Class		A		A		A		
Max. input consumption		W	2650		2,300		3,300		
Max. input current		A	11		12		16		
Compressor	Type		ROTARY		ROTARY		ROTARY		
	Rated current(RLA)	A	7.5		7.32		6.95		
	Locked rotor Amp(LRA)	A	—		—		—		
	Thermal protector position		INTERNAL		INTERNAL		INTERNAL		
	Refrigerant oil	ml	ESTER OIL VG74/440		ESTER OIL VG74/450		ESTER OIL VG74/670		
Outdoor fan motor	Type		DC Inverter		DC Inverter		DC Inverter		
	Qty		1		1		1		
	Speed	rpm	810		810		750		
Outdoor air flow		m ³ /h	2000		2,000		3,000		
Indoor sound power level		dB(A)	53		53		53		
Outdoor sound pressure level		dB(A)	54		56		62		
Outdoor sound power level		dB(A)	64		65		66		
Throttle type			Capillary+EXV		Capillary+EXV		Capillary+EXV		
Outdoor unit	Dimension(WxDxH)	mm	800x333x554		800x333x554		845x363x702		
	Packing(WxDxH)	mm	920x390x615		920x390x615		965x395x765		
	Net/Gross weight	kg	31.5/34.5		37.5/40.5		52.7/56.1		
Refrigerant	Type		R-410A		R-410A		R-410A		
	GWP		2,088		2,088		2,088		
	Charged quantity	kg	1.25		1.70		2.10		
Refrigerant piping	Liquid side/ Gas side	mm(inch)	2 sets Φ 6.35/ Φ 9.52(1/4"/3/8")		2 sets Φ 6.35/ Φ 9.52(1/4"/3/8")		3 sets Φ 6.35/ Φ 9.52(1/4"/3/8")		
	Max. length for all rooms	m	40		40		60		
	Max. length for one indoor unit	m	25		25		30		
	Max. height difference between indoor and outdoor unit	m	15		15		15		
	Max. height difference between indoor units	m	10		10		10		
Ambient temperature	Cooling/Heating	°C	-15-50/-15-24		-15-50/-15-24		-15-50/-15-24		

Remarks: 1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in hemi-anechoic rooms.

MULTI SPLIT INVERTER 50HZ R-410A

YU4E28YEEMHO-X				YU4E36YEEMHO-X				YU5E42YEEMHO-X				
1 to 1	1 to 2	1 to 3	1 to 4 x 9K	1 to 1	1 to 2	1 to 3	1 to 4 x 9K	1 to 1	1 to 2	1 to 3	1 to 4	1 to 5 x 9K
220-240V- 50Hz, 1Ph				220-240V, 50Hz, 1Ph				220-240V, 50Hz, 1Ph				
5,000-15,000	12,000-21,000	18,000-24,000	28,000	7,000-18,000	14,000-26,000	21,000-36,000	36,000	7,000-18,000	14000-28000	21000-36000	28000-40,000	42,000
1,334-1,784	1,730-24,03	2234-2777	2520	1250-1700	1,650-2,320	2,150-3,520	3,750	680-1,800	1400-2780	2100-3450	2,700-3,700	4,230
5.8-7.8	7.5-10.7	9.7-12.1	11.3	5.4-7.4	7.2-10.1	9.3-15.3	16.5	3.0-8.0	6.2-11.8	9.0-15.0	11.6-16.0	19.4
/	/	/	3.26	/	/	/	2.81	/	/	/	/	2.91
5,000-15,000	12,000-21,000	18,000-27,000	29,000	7,000-20,000	16,000-29,000	24,000-38,000	38,000	7,000-18,000	14,000-28,000	21,000-36,000	28,000-40,000	42,000
1,656-2,520	2,131-3,419	2,959-3,515	2,290	1,375-2,440	2,050-3,340	2,880-3,360	3,000	680-1,800	1,400-2,680	1,995-3,330	2,580-3,570	3,240
7.2-11.0	9.3-14.9	12.9-15.3	10.3	5.9-10.6	8.9-14.5	12.5-14.6	13.2	3.0-8.0	6.2-11.3	8.5-14.5	11.1-15.8	15.0
/	/	/	3.71	/	/	/	3.71	/	/	/	/	3.80
6.1				6.1				5.8				
A++				A++				A				
3.8				3.8				3.8				
A				A				A				
3,500				4,600				4700				
17				21.5				22				
ROTARY				ROTARY				ROTARY				
6.95				5.1				5.1				
—				—				—				
INTERNAL				INTERNAL				INTERNAL				
ESTER OIL VG74/670				ESTER OIL VG74/1,000				ESTER OIL VG74/1,000				
DC Inverter				DC Inverter				DC Inverter				
1				1				1				
800				900				900				
3,800				3,800				3,800				
53				53				53				
62				62				63				
66				67				70				
Capillary+EXV				Capillary+EXV				Capillary+EXV				
946x410x810				946x410x810				946x410x810				
1090x500x875				1090x500x875				1090x500x875				
67.6/73.4				70/75				76/81				
R-410A				R-410A				R-410A				
2,088				2,088				2,088				
2.40				3.00				3.60				
3 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				3 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				4 sets $\Phi 6.35/\Phi 9.52(1/4''/3/8'')$ + 1 set $\Phi 6.35/\Phi 12.7(1/4''/1/2'')$				
80				80				80				
35				35				35				
15				15				15				
10				10				10				
-15-50/-15-24				-15-50/-15-24				-15-50/-15-24				

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU2E14YEEBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)		Rated Capacity (kW)(Nom. cooling)		Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit A	Unit B	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	–	2.21	–	0.93	2.21	2.44	0.27	0.68	0.77	3.27	A
	9	9	–	2.67	–	1.12	2.67	2.93	0.32	0.82	0.93	3.25	A
	12	12	–	3.57	–	1.50	3.57	3.92	0.44	1.11	1.25	3.23	A
	18	18	–	4.20	–	1.76	4.20	4.62	0.52	1.31	1.49	3.21	A
1 to 2	7+7	7	7	2.05	2.05	1.72	4.10	4.51	0.49	1.24	1.41	3.30	A
	7+9	7	9	1.85	2.38	1.77	4.22	4.56	0.50	1.27	1.42	3.32	A
	7+12	7	12	1.82	2.61	1.86	4.43	4.74	0.52	1.31	1.44	3.38	A
	9+9	9	9	2.19	2.19	1.84	4.39	4.65	0.51	1.30	1.42	3.38	A
	9+12	9	12	2.04	2.47	1.89	4.51	4.74	0.52	1.32	1.43	3.42	A

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)		Rated Capacity (kW)(Nom. heating)		Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit A	Unit B	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	–	2.42	–	1.02	2.42	2.66	0.28	0.70	0.79	3.46	B
	9	9	–	2.95	–	1.24	2.95	3.24	0.34	0.86	0.97	3.43	B
	12	12	–	3.87	–	1.63	3.87	4.26	0.45	1.13	1.28	3.42	B
	18	18	–	4.42	–	1.86	4.42	4.86	0.52	1.30	1.47	3.40	B
1 to 2	7+7	7	7	2.20	2.20	1.85	4.40	4.84	0.46	1.16	1.31	3.80	A
	7+9	7	9	1.98	2.55	1.90	4.53	4.89	0.48	1.21	1.34	3.75	A
	7+12	7	12	1.95	2.80	2.00	4.75	5.08	0.51	1.28	1.41	3.70	A
	9+9	9	9	2.35	2.35	1.98	4.71	4.99	0.51	1.27	1.39	3.70	A
	9+12	9	12	2.19	2.65	2.03	4.84	5.08	0.53	1.33	1.43	3.65	A

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU2E18YEEBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)		Rated Capacity (kW)(Nom. cooling)		Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit A	Unit B	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	–	2.30	–	0.97	2.30	2.88	0.30	0.77	1.00	2.98	C
	9	9	–	2.70	–	1.13	2.70	3.38	0.36	0.91	1.18	2.96	C
	12	12	–	3.46	–	1.45	3.46	4.33	0.46	1.18	1.53	2.93	C
	18	18	–	5.15	–	2.16	5.15	6.44	0.70	1.77	2.30	2.90	C
1 to 2	7+7	7	7	2.25	2.25	1.89	4.50	4.95	0.61	1.54	1.76	2.92	C
	7+9	7	9	2.24	2.66	2.06	4.90	5.39	0.65	1.66	1.89	2.95	C
	7+12	7	12	2.23	3.20	2.28	5.43	5.87	0.71	1.80	2.01	3.02	B
	7+18	7	18	2.22	3.33	2.33	5.55	6.10	0.70	1.78	2.02	3.12	B
	9+9	9	9	2.65	2.65	2.23	5.30	5.83	0.69	1.76	2.00	3.01	B
	9+12	9	12	2.47	2.99	2.29	5.46	5.90	0.70	1.78	1.99	3.07	B
	9+18	9	18	2.38	3.20	2.34	5.58	6.03	0.70	1.77	1.98	3.15	B
	12+12	12	12	2.76	2.76	2.32	5.52	5.96	0.70	1.78	1.99	3.10	B

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)		Rated Capacity (kW)(Nom. heating)		Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit A	Unit B	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	–	2.45	–	1.03	2.45	2.82	0.27	0.67	0.79	3.67	A
	9	9	–	2.92	–	1.23	2.92	3.36	0.32	0.80	0.95	3.64	A
	12	12	–	3.75	–	1.58	3.75	4.16	0.41	1.04	1.19	3.60	B
	18	18	–	5.40	–	2.27	5.40	5.99	0.60	1.52	1.73	3.56	B
1 to 2	7+7	7	7	2.40	2.40	2.02	4.80	5.80	0.50	1.26	1.56	3.82	A
	7+9	7	9	2.34	2.66	2.10	5.00	6.25	0.53	1.32	1.70	3.78	A
	7+12	7	12	2.29	3.29	2.34	5.58	6.03	0.60	1.51	1.67	3.70	A
	7+18	7	18	2.22	3.62	2.45	5.84	6.30	0.64	1.61	1.79	3.62	A
	9+9	9	9	2.78	2.78	2.34	5.57	6.01	0.60	1.50	1.67	3.71	A
	9+12	9	12	2.71	2.98	2.39	5.68	6.08	0.62	1.55	1.70	3.67	A
	9+18	9	18	2.50	3.37	2.46	5.86	6.21	0.65	1.63	1.78	3.60	B
	12+12	12	12	2.90	2.90	2.44	5.80	6.09	0.64	1.60	1.72	3.64	A

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU3E27YEEBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)			Rated Capacity (kW)(Nom. cooling)			Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	2.30	-	-	0.97	2.30	2.88	0.49	0.82	1.06	2.82	C
	9	9	-	-	2.77	-	-	1.16	2.77	3.46	0.59	0.98	1.27	2.82	C
	12	12	-	-	3.46	-	-	1.45	3.46	4.33	0.65	1.24	1.60	2.80	C
	18	18	-	-	5.35	-	-	2.25	5.35	6.69	0.77	1.92	2.50	2.78	D
1 to 2	7+7	7	7	-	2.20	2.20	-	1.76	4.20	5.46	0.56	1.33	1.79	3.15	B
	7+9	7	9	-	2.08	2.67	-	2.00	4.75	6.18	0.64	1.52	2.04	3.12	B
	7+12	7	12	-	1.92	3.28	-	2.18	5.20	6.76	0.70	1.68	2.25	3.10	B
	7+18	7	18	-	2.03	5.22	-	3.05	7.25	8.15	1.00	2.38	2.76	3.05	B
	9+9	9	9	-	2.60	2.60	-	2.18	5.20	6.76	0.70	1.67	2.24	3.12	B
	9+12	9	12	-	2.57	3.43	-	2.52	6.00	7.50	0.82	1.95	2.52	3.08	B
	9+18	9	18	-	2.50	5.00	-	3.15	7.50	8.25	1.04	2.48	2.83	3.02	B
	12+12	12	12	-	3.23	3.23	-	2.71	6.45	7.80	0.89	2.11	2.64	3.05	B
	12+18	12	18	-	3.08	4.62	-	3.23	7.70	8.30	1.10	2.61	2.91	2.95	C
	18+18	18	18	-	4.03	4.03	-	3.39	8.06	8.35	1.06	2.52	2.69	3.20	B
1 to 3	7+7+7	7	7	7	2.48	2.48	2.48	3.12	7.44	7.64	1.01	2.40	2.55	3.10	B
	7+7+9	7	7	9	2.29	2.29	2.94	3.16	7.51	7.80	1.00	2.39	2.56	3.15	B
	7+7+12	7	7	12	2.09	2.09	3.58	3.26	7.75	8.15	1.02	2.42	2.63	3.20	B
	7+7+18	7	7	18	1.76	1.76	4.54	3.39	8.07	8.35	1.04	2.47	2.64	3.26	A
	7+9+9	7	9	9	2.16	2.78	2.78	3.24	7.71	8.12	1.02	2.42	2.63	3.19	B
	7+9+12	7	9	12	1.89	2.62	3.64	3.42	8.15	8.25	1.07	2.54	2.65	3.21	A
	7+9+18	7	9	18	1.78	2.37	4.05	3.44	8.20	8.46	1.05	2.50	2.66	3.28	A
	7+12+12	7	12	12	1.82	3.07	3.07	3.34	7.95	8.35	1.03	2.45	2.66	3.24	A
	7+12+18	7	12	18	1.75	2.80	3.60	3.42	8.15	8.40	1.04	2.48	2.66	3.28	A
	9+9+9	9	9	9	2.64	2.64	2.64	3.32	7.91	8.31	1.03	2.46	2.67	3.21	A
	9+9+12	9	9	12	2.39	2.39	3.18	3.34	7.95	8.35	1.03	2.45	2.65	3.25	A
	9+9+18	9	9	18	2.32	2.32	3.56	3.44	8.20	8.46	1.06	2.52	2.68	3.26	A
	9+12+12	9	12	12	2.25	2.90	2.90	3.38	8.05	8.37	1.02	2.44	2.62	3.30	A
	9+12+18	9	12	18	2.18	2.80	3.27	3.47	8.25	8.46	1.04	2.48	2.66	3.32	A
12+12+12	12	12	12	2.74	2.74	2.74	3.45	8.21	8.46	1.05	2.50	2.66	3.28	A	

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU3E27YEEBMHO-X

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)			Rated Capacity (kW)(Nom. heating)			Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	2.55	-	-	1.07	2.55	3.14	0.55	0.85	1.10	3.00	D
	9	9	-	-	2.92	-	-	1.23	2.92	3.74	0.55	0.99	1.32	2.95	D
	12	12	-	-	3.75	-	-	1.58	3.75	4.80	0.58	1.29	1.56	2.90	D
	18	18	-	-	5.40	-	-	2.27	5.40	6.90	0.76	1.89	2.27	2.85	D
1 to 2	7+7	7	7	-	2.20	2.60	-	2.02	4.80	5.81	0.57	1.42	1.90	3.39	C
	7+9	7	9	-	2.34	3.01	-	2.25	5.35	6.70	0.65	1.62	2.10	3.30	C
	7+12	7	12	-	2.23	3.82	-	2.54	6.05	7.30	0.74	1.86	2.35	3.25	C
	7+18	7	18	-	2.08	5.34	-	3.12	7.42	8.30	0.93	2.32	2.65	3.20	C
	9+9	9	9	-	3.24	3.24	-	2.72	6.48	7.15	0.80	1.99	2.51	3.26	C
	9+12	9	12	-	3.24	4.31	-	3.17	7.55	7.76	0.94	2.34	2.55	3.22	C
	9+18	9	18	-	2.72	5.43	-	3.42	8.15	8.42	1.03	2.56	2.68	3.18	D
	12+12	12	12	-	3.90	3.90	-	3.28	7.80	8.13	0.98	2.44	2.60	3.20	C
	12+18	12	18	-	3.32	4.98	-	3.49	8.30	8.60	1.05	2.63	2.68	3.15	D
18+18	18	18	-	4.30	4.30	-	3.61	8.60	8.88	1.05	2.62	2.68	3.28	C	
1 to 3	7+7+7	7	7	7	2.57	2.57	2.57	3.24	7.72	7.88	0.82	2.06	2.55	3.75	A
	7+7+9	7	7	9	2.40	2.40	3.08	3.31	7.88	8.10	0.85	2.12	2.58	3.72	A
	7+7+12	7	7	12	2.19	2.19	3.75	3.41	8.13	8.30	0.88	2.20	2.65	3.70	A
	7+7+18	7	7	18	1.87	1.87	4.80	3.59	8.54	8.78	0.93	2.32	2.68	3.68	A
	7+9+9	7	9	9	2.23	2.86	2.86	3.34	7.95	8.25	0.88	2.21	2.65	3.60	B
	7+9+12	7	9	12	2.06	2.65	3.54	3.47	8.25	8.55	0.91	2.28	2.68	3.62	A
	7+9+18	7	9	18	1.79	2.30	4.61	3.66	8.70	8.95	0.95	2.38	2.68	3.65	A
	7+12+12	7	12	12	1.93	3.31	3.31	3.59	8.54	8.78	0.94	2.36	2.68	3.62	A
	7+12+18	7	12	18	1.90	3.20	3.55	3.63	8.65	8.91	0.96	2.40	2.68	3.60	B
	9+9+9	9	9	9	2.74	2.74	2.74	3.45	8.21	8.54	0.91	2.27	2.68	3.61	A
	9+9+12	9	9	12	2.51	2.51	3.35	3.52	8.37	8.71	0.92	2.29	2.68	3.66	A
	9+9+18	9	9	18	2.42	2.42	3.81	3.63	8.65	8.91	0.96	2.39	2.68	3.62	A
	9+12+12	9	12	12	2.35	2.35	3.92	3.62	8.62	8.88	0.94	2.36	2.68	3.65	A
	9+12+18	9	12	18	2.28	2.32	4.30	3.74	8.90	9.10	1.01	2.53	2.68	3.52	B
12+12+12	12	12	12	2.96	2.96	2.96	3.72	8.87	9.04	0.99	2.48	2.68	3.58	B	

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU4E28YEEBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)				Rated Capacity (kW)(Nom. cooling)				Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	-	2.30	-	-	-	1.61	2.30	2.81	0.74	0.86	1.33	2.68	D
	9	9	-	-	-	2.70	-	-	-	1.89	2.70	3.29	0.84	1.03	1.51	2.61	D
	12	12	-	-	-	3.46	-	-	-	2.42	3.46	4.22	0.99	1.37	1.79	2.52	E
	18	18	-	-	-	5.35	-	-	-	3.75	5.35	6.53	1.54	2.18	2.58	2.45	E
1 to 2	24	24	-	-	-	6.70	-	-	-	4.50	6.70	8.00	1.80	2.77	3.35	2.42	E
	7+7	7	7	-	-	2.28	2.28	-	-	1.92	4.56	5.56	1.01	1.49	2.36	3.06	B
	7+9	7	9	-	-	2.37	3.07	-	-	2.28	5.44	6.64	1.21	1.83	2.61	2.98	C
	7+12	7	12	-	-	2.35	3.75	-	-	2.56	6.10	7.44	1.36	2.09	2.77	2.92	C
	7+18	7	18	-	-	2.12	5.61	-	-	3.25	7.73	9.08	1.63	2.68	3.03	2.88	C
	7+24	7	24	-	-	2.03	6.07	-	-	3.40	8.10	9.30	1.92	2.89	3.40	2.80	C
	9+9	9	9	-	-	3.02	3.02	-	-	2.54	6.04	7.37	1.34	2.00	2.76	3.02	B
	9+12	9	12	-	-	2.81	3.45	-	-	2.63	6.26	7.64	1.32	2.11	2.75	2.96	C
	9+18	9	18	-	-	2.59	5.29	-	-	3.31	7.88	9.11	1.62	2.72	2.96	2.90	C
	9+24	9	24	-	-	2.40	5.82	-	-	3.60	8.22	9.45	1.73	2.88	3.02	2.85	C
	12+12	12	12	-	-	3.65	3.65	-	-	3.07	7.30	8.91	1.54	2.47	2.97	2.95	C
	12+18	12	18	-	-	3.06	5.06	-	-	3.41	8.12	9.18	1.61	2.88	3.02	2.82	C
	12+24	12	24	-	-	2.80	6.30	-	-	3.82	9.10	9.94	1.72	3.31	3.64	2.75	D
	18+18	18	18	-	-	4.51	4.51	-	-	3.79	9.02	9.79	1.71	3.28	3.03	2.75	D
1 to 3	7+7+7	7	7	7	-	2.09	2.09	2.09	-	2.64	6.28	7.66	1.33	1.93	2.75	3.25	A
	7+7+9	7	7	9	-	2.21	2.21	2.88	-	3.07	7.30	8.91	1.54	2.28	2.97	3.20	B
	7+7+12	7	7	12	-	2.10	2.10	3.36	-	3.18	7.56	9.02	1.57	2.40	3.02	3.15	B
	7+7+18	7	7	18	-	1.86	1.86	4.93	-	3.63	8.65	9.44	1.70	2.79	3.03	3.10	B
	7+7+24	7	7	24	-	1.80	1.80	5.60	-	3.86	9.20	9.75	1.86	3.01	3.26	3.06	B
	7+9+9	7	9	9	-	2.10	2.68	2.78	-	3.18	7.56	9.02	1.57	2.35	3.02	3.22	A
	7+9+12	7	9	12	-	2.02	2.63	3.23	-	3.31	7.88	9.11	1.62	2.48	3.03	3.18	B
	7+9+18	7	9	18	-	1.81	2.35	4.80	-	3.76	8.96	9.74	1.72	2.80	3.03	3.20	B
	7+9+24	7	9	24	-	1.70	2.25	5.87	-	4.12	9.82	9.94	1.88	3.07	3.30	3.20	B
	7+12+12	7	12	12	-	1.93	3.09	3.09	-	3.41	8.12	9.18	1.61	2.62	3.03	3.10	B
	7+12+18	7	12	18	-	1.72	2.75	4.55	-	3.79	9.02	9.79	1.71	2.89	3.03	3.12	B
	9+9+9	9	9	9	-	2.63	2.63	2.63	-	3.31	7.88	9.11	1.62	2.46	3.03	3.20	B
	9+9+12	9	9	12	-	2.51	2.51	3.09	-	3.41	8.12	9.18	1.61	2.58	3.03	3.15	B
	9+9+18	9	9	18	-	2.23	2.23	4.55	-	3.79	9.02	9.79	1.71	2.89	3.03	3.12	B
	9+12+12	9	12	12	-	2.50	3.08	3.08	-	3.63	8.65	9.44	1.70	2.75	3.03	3.14	B
	9+12+18	9	12	18	-	2.13	2.62	4.34	-	3.82	9.09	9.82	1.72	2.97	3.03	3.06	B
	12+12+12	12	12	12	-	2.95	2.95	2.95	-	3.72	8.85	9.70	1.70	2.85	3.03	3.10	B
	12+12+18	12	12	18	-	2.85	2.85	4.10	-	4.12	9.80	9.94	1.86	3.25	3.31	3.02	B
1 to 4	7+7+7+7	7	7	7	7	2.05	2.05	2.05	2.06	5.34	8.21	9.00	1.48	2.27	2.79	3.61	A
	7+7+7+9	7	7	7	9	1.98	1.98	1.98	2.56	5.53	8.50	9.35	1.54	2.33	2.87	3.65	A
	7+7+7+12	7	7	7	12	1.94	1.94	1.94	3.10	5.80	8.92	9.72	1.61	2.42	2.98	3.68	A
	7+7+7+18	7	7	7	18	1.73	1.73	1.73	4.61	6.37	9.80	9.94	1.79	2.71	3.03	3.62	A
	7+7+9+9	7	7	9	9	1.91	1.91	2.49	2.49	5.72	8.80	9.38	1.59	2.39	2.97	3.68	A
	7+7+9+12	7	7	9	12	1.88	1.88	2.45	3.01	5.99	9.22	9.78	1.68	2.49	3.02	3.70	A
	7+7+9+18	7	7	9	18	1.80	1.80	2.36	3.84	6.37	9.80	9.94	1.79	2.68	3.03	3.65	A
	7+7+12+12	7	7	12	12	1.86	1.86	2.97	2.86	6.27	9.55	9.82	1.76	2.57	3.03	3.72	A
	7+9+9+9	7	9	9	9	1.85	2.41	2.41	2.41	5.90	9.08	9.41	1.65	2.45	3.02	3.70	A
	7+9+9+12	7	9	9	12	1.83	2.38	2.38	2.92	6.18	9.51	9.82	1.73	2.56	3.03	3.72	A
	7+9+12+12	7	9	12	12	1.81	2.35	2.89	2.75	6.37	9.80	9.94	1.82	2.68	3.03	3.65	A
	9+9+9+9	9	9	9	9	2.34	2.34	2.34	2.32	6.07	9.34	9.94	1.70	2.51	3.03	3.72	A
9+9+9+12	9	9	9	12	2.32	2.32	2.32	2.84	6.37	9.80	9.94	1.79	2.68	3.03	3.65	A	

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU4E28YEEMHO-X

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)				Rated Capacity (kW)(Nom. heating)				Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	-	2.65	-	-	-	1.86	2.65	3.23	0.79	0.94	1.41	2.81	D
	9	9	-	-	-	2.92	-	-	-	2.04	2.92	3.56	0.87	1.06	1.55	2.76	E
	12	12	-	-	-	3.75	-	-	-	2.63	3.75	4.58	1.06	1.39	1.89	2.70	E
	18	18	-	-	-	5.85	-	-	-	4.10	5.85	7.14	1.65	2.22	2.50	2.63	E
	24	24	-	-	-	7.18	-	-	-	5.03	7.18	8.76	2.04	2.76	3.10	2.60	E
1 to 2	7+7	7	7	-	-	2.38	2.38	-	-	3.09	4.76	5.81	1.05	1.51	2.04	3.16	D
	7+9	7	9	-	-	2.63	3.41	-	-	3.93	6.04	7.37	1.33	1.94	2.24	3.12	D
	7+12	7	12	-	-	2.55	4.09	-	-	4.32	6.64	8.10	1.46	2.14	2.35	3.10	D
	7+18	7	18	-	-	2.29	6.07	-	-	5.43	8.36	9.80	1.72	2.74	2.88	3.05	D
	7+24	7	24	-	-	2.10	6.40	-	-	5.53	8.50	10.37	1.80	2.83	2.96	3.00	D
	9+9	9	9	-	-	3.32	3.32	-	-	4.32	6.64	8.10	1.43	2.11	2.32	3.15	D
	9+12	9	12	-	-	3.08	3.78	-	-	4.46	6.86	8.37	1.47	2.21	2.36	3.10	D
	9+18	9	18	-	-	2.77	5.65	-	-	5.47	8.42	10.02	1.72	2.79	2.88	3.02	D
	9+24	9	24	-	-	2.66	5.94	-	-	5.59	8.60	10.32	1.81	2.87	2.98	3.00	D
	12+12	12	12	-	-	3.58	3.58	-	-	4.65	7.15	8.72	1.54	2.32	2.52	3.08	D
	12+18	12	18	-	-	3.15	5.21	-	-	5.43	8.36	9.80	1.70	2.79	2.86	3.00	D
	12+24	12	24	-	-	3.02	5.44	-	-	5.50	8.46	10.15	1.89	2.87	2.90	2.95	D
18+18	18	18	-	-	4.41	3.97	-	-	5.43	8.38	10.10	1.80	2.87	2.90	2.92	D	
1 to 3	7+7+7	7	7	7	-	2.28	2.28	2.28	-	4.45	6.85	8.36	1.47	1.97	2.36	3.47	B
	7+7+9	7	7	9	-	2.36	2.36	3.06	-	5.06	7.78	9.49	1.67	2.26	2.83	3.45	B
	7+7+12	7	7	12	-	2.32	2.32	3.72	-	5.43	8.36	9.60	1.72	2.46	2.88	3.40	B
	7+7+18	7	7	18	-	2.02	2.02	5.35	-	6.10	9.38	10.20	1.87	2.80	2.90	3.35	C
	7+7+24	7	7	24	-	1.94	1.94	5.62	-	6.18	9.50	10.30	1.89	2.88	2.90	3.30	C
	7+9+9	7	9	9	-	2.32	3.02	3.02	-	5.43	8.36	9.60	1.72	2.44	2.88	3.42	B
	7+9+12	7	9	12	-	2.18	2.84	3.50	-	5.54	8.52	10.00	1.74	2.52	2.88	3.38	C
	7+9+18	7	9	18	-	1.98	2.57	4.96	-	6.36	9.50	10.40	1.87	2.84	2.90	3.35	C
	7+9+24	7	9	24	-	1.80	2.40	5.45	-	6.27	9.65	10.50	1.92	2.85	2.90	3.30	C
	7+12+12	7	12	12	-	2.11	3.38	3.38	-	5.76	8.86	10.11	1.77	2.72	2.90	3.25	C
	7+12+18	7	12	18	-	1.89	3.02	5.01	-	6.45	9.92	10.56	1.87	2.80	2.90	3.20	C
	9+9+9	9	9	9	-	2.84	2.84	2.84	-	5.54	8.52	10.00	1.74	2.52	2.88	3.38	C
	9+9+12	9	9	12	-	2.74	2.74	3.38	-	5.76	8.86	10.11	1.77	2.72	2.90	3.25	C
	9+9+18	9	9	18	-	2.46	2.46	5.01	-	6.45	9.92	10.56	1.87	2.80	2.90	3.20	C
	9+12+12	9	12	12	-	2.71	3.34	3.34	-	6.10	9.38	10.20	1.86	2.76	2.90	3.22	C
	9+12+18	9	12	18	-	2.36	2.91	4.81	-	6.55	10.08	10.60	1.89	2.80	2.90	3.15	D
	12+12+12	12	12	12	-	3.25	3.25	3.25	-	6.34	9.76	10.52	1.88	2.78	2.90	3.18	D
	12+12+18	12	12	18	-	3.10	3.10	3.90	-	6.70	10.10	10.60	1.92	2.85	2.90	3.10	D
1 to 4	7+7+7+7	7	7	7	7	2.27	2.27	2.27	1.98	6.36	8.79	10.00	1.59	2.43	2.74	3.61	A
	7+7+7+9	7	7	7	9	2.17	2.17	2.17	2.83	6.54	9.34	10.18	1.63	2.51	2.79	3.72	A
	7+7+7+12	7	7	7	12	2.11	2.11	2.11	3.65	6.80	9.98	10.50	1.70	2.66	2.86	3.75	A
	7+7+7+18	7	7	7	18	1.85	1.85	1.85	4.55	7.33	10.10	10.60	1.86	2.76	2.90	3.66	A
	7+7+9+9	7	7	9	9	2.09	2.09	2.71	3.03	6.72	9.92	10.32	1.68	2.65	2.85	3.75	A
	7+7+9+12	7	7	9	12	2.04	2.04	2.65	3.33	6.99	10.06	10.58	1.75	2.72	2.89	3.70	A
	7+7+9+18	7	7	9	18	1.98	1.98	2.50	3.64	7.30	10.10	10.60	1.86	2.74	2.90	3.68	A
	7+7+12+12	7	7	12	12	1.99	1.99	3.18	2.94	7.25	10.10	10.60	1.84	2.76	2.90	3.66	A
	7+9+9+9	7	9	9	9	2.01	2.61	2.61	2.79	6.90	10.02	10.54	1.73	2.71	2.88	3.70	A
	7+9+9+12	7	9	9	12	1.96	2.55	2.55	3.04	7.14	10.10	10.60	1.80	2.74	2.90	3.68	A
	7+9+12+12	7	9	12	12	1.93	2.51	3.08	2.58	7.42	10.10	10.60	1.89	2.77	2.90	3.65	A
	9+9+9+9	9	9	9	9	2.53	2.53	2.53	2.51	7.07	10.10	10.60	1.78	2.74	2.90	3.68	A
	9+9+9+12	9	9	9	12	2.47	2.47	2.47	2.69	7.42	10.10	10.60	1.86	2.76	2.90	3.66	A

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU4E36YEEBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)				Rated Capacity (kW)(Nom. cooling)				Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	-	2.30	-	-	-	0.94	2.30	2.78	0.72	0.97	1.22	2.38	E
	9	9	-	-	-	2.70	-	-	-	1.11	2.70	3.27	0.78	1.17	1.49	2.30	E
	12	12	-	-	-	3.46	-	-	-	1.42	3.46	4.19	0.99	1.57	2.00	2.20	E
	18	18	-	-	-	5.84	-	-	-	2.39	5.84	7.07	1.64	2.72	3.45	2.15	E
1 to 2	24	24	-	-	-	7.40	-	-	-	3.11	7.40	8.50	1.78	3.49	4.21	2.12	E
	7+7	7	7	-	-	2.08	2.08	-	-	1.71	4.16	5.03	0.71	1.70	2.14	2.45	E
	7+9	7	9	-	-	2.37	3.07	-	-	2.23	5.44	6.58	0.93	2.25	2.84	2.42	E
	7+12	7	12	-	-	2.25	3.59	-	-	2.39	5.84	7.07	0.98	2.45	3.10	2.38	E
	7+18	7	18	-	-	1.98	5.24	-	-	2.96	7.22	8.74	1.16	3.11	3.94	2.32	E
	7+24	7	24	-	-	1.90	7.28	-	-	3.86	9.18	11.02	1.45	4.03	5.05	2.28	E
	9+9	9	9	-	-	2.92	2.92	-	-	2.39	5.84	7.07	0.98	2.43	3.07	2.40	E
	9+12	9	12	-	-	2.62	3.22	-	-	2.39	5.84	7.07	0.98	2.51	3.17	2.33	E
	9+18	9	18	-	-	2.68	5.47	-	-	3.34	8.15	9.86	1.25	3.57	4.52	2.28	E
	9+24	9	24	-	-	2.60	7.10	-	-	3.98	9.70	11.64	1.57	4.35	5.46	2.23	E
	12+12	12	12	-	-	3.14	3.14	-	-	2.57	6.28	7.60	1.03	2.73	3.45	2.30	E
	12+18	12	18	-	-	3.07	5.08	-	-	3.34	8.15	9.86	1.25	3.64	4.61	2.24	E
	12+24	12	24	-	-	2.96	7.24	-	-	4.18	10.20	12.24	1.85	4.64	5.83	2.20	E
18+18	18	18	-	-	5.25	4.85	-	-	4.31	10.10	12.71	1.45	4.59	6.05	2.20	E	
1 to 3	7+7+7	7	7	7	-	2.09	2.09	2.09	-	2.57	6.28	7.60	1.03	2.46	3.09	2.55	E
	7+7+9	7	7	9	-	2.05	2.05	3.12	-	2.96	7.22	8.74	1.16	2.87	3.60	2.52	E
	7+7+12	7	7	12	-	2.01	2.01	3.21	-	2.96	7.22	8.74	1.16	2.91	3.66	2.48	E
	7+7+18	7	7	18	-	2.00	2.00	5.75	-	4.00	9.75	11.80	1.42	4.06	5.11	2.40	E
	7+7+24	7	7	24	-	1.96	1.96	6.48	-	4.26	10.40	12.58	1.76	4.41	5.54	2.36	E
	7+9+9	7	9	9	-	2.20	2.68	2.34	-	2.96	7.22	8.54	1.16	2.91	3.57	2.48	E
	7+9+12	7	9	12	-	2.12	2.72	3.31	-	3.34	8.15	9.86	1.25	3.40	4.27	2.40	E
	7+9+18	7	9	18	-	2.02	2.68	5.80	-	4.31	10.50	12.71	1.45	4.45	5.60	2.36	E
	7+9+24	7	9	24	-	1.95	2.60	6.05	-	4.35	10.60	12.83	1.65	4.59	5.78	2.31	E
	7+12+12	7	12	12	-	1.94	3.10	3.10	-	3.34	8.15	9.86	1.25	3.42	4.31	2.38	E
	7+12+18	7	12	18	-	1.89	3.05	5.56	-	4.31	10.50	12.71	1.45	4.53	5.70	2.32	E
	7+12+24	7	12	24	-	1.82	2.96	6.82	-	4.76	11.60	13.80	2.33	5.07	6.27	2.29	E
	7+18+18	7	18	18	-	1.88	4.98	4.98	-	4.85	11.84	13.80	1.60	5.19	6.30	2.28	E
	9+9+9	9	9	9	-	2.72	2.72	2.72	-	3.34	8.15	9.86	1.25	3.33	4.18	2.45	E
	9+9+12	9	9	12	-	2.62	2.62	2.91	-	3.34	8.15	9.86	1.25	3.41	4.29	2.39	E
	9+9+18	9	9	18	-	2.55	2.55	5.40	-	4.31	10.50	12.71	1.45	4.45	5.60	2.36	E
	9+9+24	9	9	24	-	2.50	2.50	5.80	-	4.43	10.80	12.96	1.68	4.66	5.81	2.32	E
	9+12+12	9	12	12	-	2.82	3.47	3.47	-	4.00	9.75	11.80	1.42	4.06	5.11	2.40	E
	9+12+18	9	12	18	-	2.63	3.20	4.16	-	3.73	9.99	11.00	1.25	4.31	4.93	2.32	E
	9+12+24	9	12	24	-	2.58	3.00	6.22	-	4.84	11.80	13.80	1.55	5.18	6.30	2.28	E
9+18+18	9	18	18	-	2.33	4.75	4.75	-	4.85	11.84	13.80	1.60	5.33	6.48	2.22	E	
12+12+12	12	12	12	-	3.25	3.25	3.25	-	4.00	9.75	11.80	1.42	4.11	5.18	2.37	E	
12+12+18	12	12	18	-	3.20	3.20	4.65	-	4.53	11.05	13.37	1.54	4.80	6.05	2.30	E	
12+12+24	12	12	24	-	3.00	3.00	5.90	-	4.88	11.90	13.80	1.59	5.29	6.39	2.25	E	
12+18+18	12	18	18	-	2.75	4.55	4.55	-	4.85	11.84	13.80	1.60	5.36	6.51	2.21	E	

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU4E36YEEBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)				Rated Capacity (kW)(Nom. cooling)				Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 4	7+7+7+7	7	7	7	7	2.10	2.10	2.10	2.10	5.88	8.40	10.92	1.65	3.36	4.53	2.50	E
	7+7+7+9	7	7	7	9	2.00	2.00	2.00	2.50	5.95	8.50	11.05	1.67	3.29	4.44	2.58	E
	7+7+7+12	7	7	7	12	2.00	2.00	2.00	3.50	6.65	9.50	12.35	1.87	3.57	4.81	2.66	D
	7+7+7+18	7	7	7	18	1.90	1.90	1.90	4.30	7.00	10.00	13.00	1.97	3.60	4.83	2.78	D
	7+7+7+24	7	7	7	24	1.80	1.80	1.80	5.60	7.70	11.00	13.80	2.04	4.07	5.29	2.70	D
	7+7+9+9	7	7	9	9	2.00	2.00	2.50	2.50	6.30	9.00	11.70	1.77	3.38	4.55	2.66	D
	7+7+9+12	7	7	9	12	1.98	1.98	2.50	3.54	7.00	10.00	13.00	1.97	3.73	5.02	2.68	D
	7+7+9+18	7	7	9	18	1.90	1.90	2.30	4.30	7.28	10.40	13.52	2.05	3.71	4.99	2.80	C
	7+7+9+24	7	7	9	24	1.86	1.86	2.20	5.08	7.70	11.00	13.80	2.02	4.04	5.25	2.72	D
	7+7+12+12	7	7	12	12	1.90	1.90	3.30	3.30	7.28	10.40	13.52	2.05	3.85	5.18	2.70	D
	7+7+12+18	7	7	12	18	1.80	1.80	3.10	4.30	7.70	11.00	13.80	2.16	3.90	5.05	2.82	C
	7+7+18+18	7	7	18	18	1.70	1.70	4.50	4.50	8.68	12.40	13.80	2.44	4.34	4.98	2.86	C
	7+9+9+9	7	9	9	9	2.00	2.50	2.50	2.50	6.65	9.50	12.35	1.87	3.54	4.77	2.68	D
	7+9+9+12	7	9	9	12	1.95	2.50	2.50	3.55	7.35	10.50	13.65	2.07	3.89	5.23	2.70	D
	7+9+9+18	7	9	9	18	1.93	2.50	2.50	5.07	8.40	12.00	13.80	2.36	4.20	4.98	2.86	C
	7+9+9+24	7	9	9	24	1.85	2.30	2.30	6.05	8.75	12.50	13.80	2.23	4.46	5.09	2.80	C
	7+9+12+12	7	9	12	12	2.00	2.50	3.50	3.50	8.05	11.50	13.80	2.26	4.18	5.19	2.75	D
	7+9+12+18	7	9	12	18	1.90	2.30	3.30	4.50	8.40	12.00	13.80	2.36	4.24	5.04	2.83	C
	7+9+18+18	7	9	18	18	1.80	2.30	4.50	4.30	9.03	12.90	13.80	2.74	4.48	4.95	2.88	C
	7+12+12+12	7	12	12	12	2.00	3.50	3.50	3.50	8.75	12.50	13.80	2.57	4.48	5.11	2.79	D
	7+12+12+18	7	12	12	18	1.80	3.30	3.30	4.50	9.03	12.90	13.80	2.74	4.53	5.00	2.85	C
	9+9+9+9	9	9	9	9	2.64	2.64	2.64	2.64	7.39	10.56	13.73	3.56	3.90	5.24	2.71	D
	9+9+9+12	9	9	9	12	2.50	2.50	2.50	3.50	7.70	11.00	13.80	2.15	4.00	5.19	2.75	D
	9+9+9+18	9	9	9	18	2.50	2.50	2.50	5.00	8.75	12.50	13.80	2.44	4.42	5.04	2.83	C
	9+9+12+12	9	9	12	12	2.50	2.50	3.50	3.50	8.40	12.00	13.80	2.35	4.30	5.11	2.79	D
	9+9+12+18	9	9	12	18	2.30	2.30	3.30	4.90	8.68	12.80	13.80	2.63	4.49	5.00	2.85	C
	9+12+12+12	9	12	12	12	2.30	2.30	3.50	3.50	8.12	11.60	13.80	2.27	4.13	5.07	2.81	C
	9+12+12+18	9	12	12	18	2.30	3.30	3.30	4.50	9.38	13.40	13.80	2.84	4.72	5.02	2.84	C
	12+12+12+12	12	12	12	12	3.30	3.30	3.30	3.30	8.68	13.20	13.80	2.63	4.60	4.96	2.87	C
	12+12+12+18	12	12	12	18	3.10	3.10	3.10	4.10	9.38	13.40	13.80	2.82	4.70	5.00	2.85	C

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU4E36YEEBMHO-X

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)				Rated Capacity (kW)(Nom. heating)				Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	-	2.65	-	-	-	1.86	2.65	3.26	0.82	0.92	1.37	2.88	D
	9	9	-	-	-	2.92	-	-	-	2.04	2.92	3.59	0.91	1.04	1.51	2.80	D
	12	12	-	-	-	3.75	-	-	-	2.63	3.75	4.61	1.15	1.36	1.91	2.75	E
	18	18	-	-	-	6.34	-	-	-	4.44	6.34	7.80	1.35	2.35	3.07	2.70	E
	24	24	-	-	-	7.50	-	-	-	5.25	7.50	9.23	1.41	2.82	4.17	2.66	E
1 to 2	7+7	7	7	-	-	2.38	2.38	-	-	2.00	4.76	5.85	0.78	1.41	2.43	3.38	C
	7+9	7	9	-	-	2.63	3.41	-	-	2.54	6.04	7.43	0.94	1.80	2.93	3.35	C
	7+12	7	12	-	-	2.44	3.90	-	-	2.66	6.34	7.80	0.97	1.92	3.04	3.30	C
	7+18	7	18	-	-	2.37	6.28	-	-	3.63	8.65	10.64	1.21	2.65	3.50	3.26	C
	7+24	7	24	-	-	2.30	6.80	-	-	3.82	9.10	10.92	1.41	2.83	3.87	3.22	C
	9+9	9	9	-	-	3.17	3.17	-	-	2.66	6.34	7.80	0.97	1.92	3.04	3.30	C
	9+12	9	12	-	-	3.07	3.77	-	-	2.87	6.84	8.41	1.05	2.10	3.28	3.26	C
	9+18	9	18	-	-	2.90	5.92	-	-	3.70	8.82	10.85	0.99	2.74	3.09	3.22	C
	9+24	9	24	-	-	2.80	7.50	-	-	4.33	10.30	12.57	1.62	3.24	3.76	3.18	D
	12+12	12	12	-	-	3.61	3.61	-	-	3.03	7.22	8.88	1.06	2.22	3.32	3.25	C
	12+18	12	18	-	-	3.32	5.50	-	-	3.70	8.82	10.85	1.16	2.76	3.09	3.20	C
12+24	12	24	-	-	3.10	8.20	-	-	4.75	11.30	13.56	1.50	3.58	4.01	3.16	D	
18+18	18	18	-	-	5.55	5.55	-	-	4.66	11.10	13.65	1.35	3.49	3.91	3.18	D	
1 to 3	7+7+7	7	7	7	-	2.28	2.28	2.28	-	2.87	6.84	8.41	1.05	1.90	3.28	3.60	B
	7+7+9	7	7	9	-	2.19	2.19	2.84	-	3.03	7.22	8.88	1.00	2.03	3.32	3.56	B
	7+7+12	7	7	12	-	2.40	2.40	3.84	-	3.63	8.65	10.64	1.02	2.46	3.79	3.52	B
	7+7+18	7	7	18	-	2.33	2.33	6.18	-	4.56	10.85	13.35	1.27	3.12	4.20	3.48	B
	7+7+24	7	7	24	-	2.10	2.10	7.00	-	4.70	11.20	13.78	1.34	3.29	4.20	3.40	B
	7+9+9	7	9	9	-	2.30	2.88	3.47	-	3.63	8.65	10.64	1.21	2.46	3.79	3.52	B
	7+9+12	7	9	12	-	2.22	2.78	3.65	-	3.63	8.65	10.64	1.21	2.49	3.79	3.48	B
	7+9+18	7	9	18	-	2.10	2.68	6.32	-	4.66	11.10	13.65	1.35	3.25	4.20	3.42	B
	7+9+24	7	9	24	-	2.00	2.55	6.75	-	4.75	11.30	13.79	1.60	3.34	4.26	3.38	C
	7+12+12	7	12	12	-	2.10	3.36	4.34	-	3.70	9.80	10.98	1.21	2.84	3.79	3.45	B
	7+12+18	7	12	18	-	2.01	3.18	5.91	-	4.66	11.10	13.65	1.35	3.26	4.20	3.40	B
	7+12+24	7	12	24	-	1.95	3.00	6.55	-	4.83	11.50	14.03	1.65	3.43	4.20	3.35	C
	7+18+18	7	18	18	-	1.85	4.89	4.89	-	4.88	11.63	14.30	1.41	3.51	4.20	3.31	C
	9+9+9	9	9	9	-	2.88	2.88	2.88	-	3.63	8.65	10.64	1.21	2.49	3.79	3.48	B
	9+9+12	9	9	12	-	2.73	2.73	3.36	-	3.70	8.82	10.85	1.21	2.56	3.79	3.45	B
	9+9+18	9	9	18	-	2.75	2.75	5.60	-	4.66	11.10	13.65	1.35	3.26	4.20	3.40	B
	9+9+24	9	9	24	-	2.60	2.60	5.80	-	4.62	11.00	13.55	1.32	3.25	4.18	3.38	C
	9+12+12	9	12	12	-	3.13	3.86	3.86	-	4.56	10.85	13.35	1.44	3.17	4.20	3.42	B
	9+12+18	9	12	18	-	2.13	2.62	4.64	-	3.82	9.39	11.18	1.19	2.78	3.71	3.38	C
	9+12+24	9	12	24	-	2.00	2.40	7.50	-	5.00	11.90	14.28	1.53	3.61	4.20	3.30	C
	9+18+18	9	18	18	-	2.33	4.75	4.75	-	4.97	11.84	14.21	1.52	3.59	4.20	3.30	C
12+12+12	12	12	12	-	3.62	3.62	3.62	-	4.56	10.85	13.35	1.44	3.16	4.20	3.43	B	
12+12+18	12	12	18	-	3.25	3.25	4.66	-	4.69	11.16	13.73	1.44	3.33	4.20	3.35	C	
12+12+24	12	12	24	-	3.10	3.10	6.30	-	5.25	12.50	14.38	1.60	3.79	4.20	3.30	C	
12+18+18	12	18	18	-	2.79	4.62	4.62	-	5.06	12.04	13.85	1.46	3.67	4.20	3.28	C	

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU4E36YEEBMHO-X

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)				Rated Capacity (kW)(Nom. heating)				Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 4	7+7+7+7	7	7	7	7	2.30	2.30	2.30	2.30	6.44	9.20	12.14	1.52	2.39	3.22	3.85	A
	7+7+7+9	7	7	7	9	2.30	2.30	2.30	3.00	6.93	9.90	12.87	1.54	2.62	3.51	3.78	A
	7+7+7+12	7	7	7	12	2.30	2.30	2.30	3.70	7.42	10.60	13.25	1.72	2.86	3.67	3.70	A
	7+7+7+18	7	7	7	18	2.30	2.30	2.30	5.10	8.40	12.00	14.16	2.00	3.29	3.98	3.65	A
	7+7+7+24	7	7	7	24	2.10	2.10	2.10	6.20	8.75	12.50	14.40	2.42	3.47	4.24	3.60	B
	7+7+9+9	7	7	9	9	2.30	2.30	3.00	3.00	7.42	10.60	13.25	1.63	2.86	3.58	3.70	A
	7+7+9+12	7	7	9	12	2.30	2.30	3.00	3.70	7.91	11.30	13.67	1.81	3.05	3.76	3.70	A
	7+7+9+18	7	7	9	18	2.20	2.20	2.90	5.00	8.61	12.30	14.40	2.09	3.31	4.24	3.72	A
	7+7+9+24	7	7	9	24	2.00	2.00	2.50	7.00	9.50	13.50	14.40	2.66	3.61	4.24	3.74	A
	7+7+12+12	7	7	12	12	2.30	2.30	3.60	3.60	8.26	11.80	13.92	2.00	3.19	3.91	3.70	A
	7+7+12+18	7	7	12	18	2.10	2.10	3.40	4.70	8.61	12.30	14.40	2.14	3.24	4.24	3.80	A
	7+7+18+18	7	7	18	18	2.00	2.00	4.50	4.50	9.10	13.00	14.40	2.46	3.42	4.24	3.80	A
	7+9+9+9	7	9	9	9	2.30	2.87	2.87	2.87	7.91	10.90	13.67	1.72	2.95	3.76	3.70	A
	7+9+9+12	7	9	9	12	2.20	2.80	2.80	3.60	7.98	11.40	13.79	1.90	3.08	3.85	3.70	A
	7+9+9+18	7	9	9	18	2.10	2.75	2.75	4.80	8.68	12.40	14.40	2.14	3.25	4.24	3.82	A
	7+9+9+24	7	9	9	24	2.00	2.59	2.59	6.02	9.24	13.20	14.40	2.52	3.46	4.24	3.82	A
	7+9+12+12	7	9	12	12	2.25	2.65	3.50	3.50	8.33	11.90	14.40	2.09	3.15	4.24	3.78	A
	7+9+12+18	7	9	12	18	2.10	2.40	3.40	4.70	8.82	12.60	14.40	2.25	3.29	4.24	3.83	A
	7+9+18+18	7	9	18	18	2.00	2.30	4.45	4.45	9.24	13.20	14.40	2.52	3.49	4.24	3.78	A
	7+12+12+12	7	12	12	12	2.20	3.45	3.45	3.45	8.79	12.55	14.40	2.27	3.31	4.24	3.79	A
	7+12+12+18	7	12	12	18	2.00	3.25	3.25	4.60	9.17	13.10	14.40	2.72	3.39	4.24	3.86	A
	9+9+9+9	9	9	9	9	3.00	3.00	3.00	2.14	8.40	11.14	14.16	1.89	3.00	4.00	3.71	A
	9+9+9+12	9	9	9	12	2.85	2.85	2.85	3.60	8.51	12.15	14.40	2.00	3.21	4.24	3.78	A
	9+9+9+18	9	9	9	18	2.65	2.65	2.65	4.70	8.86	12.65	14.40	2.23	3.30	4.24	3.83	A
	9+9+12+12	9	9	12	12	2.75	2.75	3.50	3.50	8.75	12.50	14.40	2.18	3.30	4.24	3.79	A
	9+9+12+18	9	9	12	18	2.60	2.60	3.40	4.70	9.31	13.30	14.40	2.44	3.45	4.24	3.86	A
	9+12+12+12	9	12	12	12	2.60	3.50	3.50	3.50	9.17	13.10	14.40	2.53	3.45	4.24	3.80	A
	9+12+12+18	9	12	12	18	2.50	3.40	3.40	4.60	9.73	13.90	14.40	2.57	3.62	4.24	3.84	A
	12+12+12+12	12	12	12	12	3.45	3.45	3.45	3.45	9.66	13.80	14.40	2.66	3.61	4.24	3.82	A
	12+12+12+18	12	12	12	18	3.30	3.30	3.30	4.10	9.73	14.00	14.40	2.70	3.70	4.24	3.78	A

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU5E42YEIBMHO-X

COOLING

Comb.	Indoor Units	Combinations (x1000 Btu/h)					Rated Capacity (kW)(Nom. cooling)					Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	-	-	2.30	-	-	-	-	0.97	2.30	2.76	0.46	0.80	1.00	2.87	C
	9	9	-	-	-	-	2.77	-	-	-	-	1.16	2.77	3.32	0.54	0.98	1.22	2.82	C
	12	12	-	-	-	-	3.46	-	-	-	-	1.45	3.46	4.15	0.62	1.24	1.55	2.78	D
	18	18	-	-	-	-	5.35	-	-	-	-	2.25	5.35	6.42	0.78	1.95	2.42	2.75	D
	24	24	-	-	-	-	7.03	-	-	-	-	2.95	7.03	8.44	1.04	2.60	3.24	2.70	D
1 to 2	7+7	7	7	-	-	-	2.00	2.00	-	-	-	1.68	4.00	4.80	0.54	1.35	1.70	2.97	C
	7+9	7	9	-	-	-	1.94	2.52	-	-	-	1.87	4.45	5.30	0.60	1.51	1.89	2.95	C
	7+12	7	12	-	-	-	1.89	3.02	-	-	-	2.06	4.91	5.80	0.67	1.67	2.09	2.93	C
	7+18	7	18	-	-	-	1.78	4.71	-	-	-	2.73	6.49	7.55	0.89	2.23	2.74	2.91	C
	7+24	7	24	-	-	-	1.73	6.04	-	-	-	3.26	7.77	8.97	1.09	2.72	3.31	2.86	C
	9+9	9	9	-	-	-	2.45	2.45	-	-	-	2.06	4.91	5.80	0.67	1.67	2.09	2.93	C
	9+12	9	12	-	-	-	2.40	2.96	-	-	-	2.25	5.36	6.30	0.74	1.85	2.29	2.90	C
	9+18	9	18	-	-	-	2.28	4.66	-	-	-	2.92	6.94	8.05	0.97	2.44	2.98	2.85	C
	9+24	9	24	-	-	-	2.23	6.00	-	-	-	3.45	8.22	9.47	1.17	2.94	3.57	2.80	C
	12+12	12	12	-	-	-	2.91	2.91	-	-	-	2.44	5.81	6.80	0.82	2.05	2.54	2.83	C
	12+18	12	18	-	-	-	2.78	4.61	-	-	-	3.11	7.39	8.55	1.05	2.62	3.20	2.82	C
	12+24	12	24	-	-	-	2.72	5.95	-	-	-	3.64	8.68	9.97	1.25	3.12	3.79	2.78	D
	18+18	18	18	-	-	-	4.49	4.49	-	-	-	3.77	8.98	10.30	1.32	3.30	4.01	2.72	D
	1 to 3	7+7+7	7	7	7	-	-	2.00	2.00	2.00	-	-	2.52	6.00	7.00	0.78	1.95	2.44	3.07
7+7+9		7	7	9	-	-	1.96	1.96	2.55	-	-	2.72	6.48	7.52	0.85	2.12	2.64	3.05	B
7+7+12		7	7	12	-	-	1.93	1.93	3.09	-	-	2.92	6.96	8.03	0.92	2.30	2.85	3.02	B
7+7+18		7	7	18	-	-	1.86	1.86	4.92	-	-	3.62	8.63	9.84	1.15	2.88	3.51	3.00	B
7+7+24		7	7	24	-	-	1.81	1.81	6.35	-	-	4.19	9.98	11.31	1.35	3.38	4.11	2.95	C
7+9+9		7	9	9	-	-	1.93	2.51	2.51	-	-	2.92	6.96	8.03	0.92	2.30	2.85	3.02	B
7+9+12		7	9	12	-	-	1.91	2.48	3.05	-	-	3.12	7.43	8.55	1.00	2.49	3.08	2.98	C
7+9+18		7	9	18	-	-	1.84	2.39	4.87	-	-	3.82	9.10	10.36	1.24	3.11	3.79	2.93	C
7+9+24		7	9	24	-	-	1.80	2.34	6.31	-	-	4.39	10.46	11.82	1.45	3.63	4.41	2.88	C
7+12+12		7	12	12	-	-	1.88	3.01	3.01	-	-	3.32	7.91	9.07	1.08	2.71	3.33	2.92	C
7+12+18		7	12	18	-	-	1.83	2.92	4.84	-	-	4.02	9.58	10.88	1.32	3.30	4.03	2.90	C
7+12+24		7	12	24	-	-	1.79	2.87	6.27	-	-	4.59	10.94	12.34	1.53	3.84	4.66	2.85	C
7+18+18		7	18	18	-	-	1.79	4.73	4.73	-	-	4.73	11.25	12.68	1.61	4.02	4.88	2.80	C
9+9+9		9	9	9	-	-	2.48	2.48	2.48	-	-	3.12	7.43	8.55	1.00	2.49	3.08	2.98	C
9+9+12		9	9	12	-	-	2.45	2.45	3.01	-	-	3.32	7.91	9.07	1.07	2.66	3.27	2.97	C
9+9+18		9	9	18	-	-	2.37	2.37	4.84	-	-	4.02	9.58	10.88	1.32	3.30	4.03	2.90	C
9+9+24		9	9	24	-	-	2.33	2.33	6.27	-	-	4.59	10.94	12.34	1.53	3.84	4.66	2.85	C
9+12+12		9	12	12	-	-	2.42	2.98	2.98	-	-	3.52	8.39	9.58	1.14	2.84	3.48	2.95	C
9+12+18		9	12	18	-	-	2.36	2.90	4.80	-	-	4.23	10.06	11.39	1.37	3.43	4.17	2.93	C
9+12+24		9	12	24	-	-	2.32	2.85	6.24	-	-	4.79	11.41	12.86	1.59	3.98	4.81	2.87	C
9+18+18		9	18	18	-	-	2.31	4.71	4.71	-	-	4.93	11.73	13.20	1.68	4.19	5.08	2.80	C
12+12+12	12	12	12	-	-	2.96	2.96	2.96	-	-	3.72	8.87	10.10	1.19	2.98	3.63	2.98	C	
12+12+18	12	12	18	-	-	2.88	2.88	4.77	-	-	4.43	10.54	11.91	1.43	3.57	4.33	2.95	C	
12+12+24	12	12	24	-	-	2.83	2.83	6.19	-	-	4.97	11.84	13.26	1.69	4.23	5.10	2.80	C	
12+18+18	12	18	18	-	-	2.80	4.63	4.63	-	-	5.06	12.06	13.39	1.73	4.34	5.19	2.78	D	

To be continued

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU5E42YEEBMHO-X

COOLING

Continued

Comb.	Indoor Units	Combinations (x1000 Btu/h)					Rated Capacity (kW)(Nom. cooling)					Total Cooling Ca- pacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 4	7+7+7+7	7	7	7	7	-	2.00	2.00	2.00	2.00	-	3.36	8.00	9.20	1.01	2.52	3.15	3.17	B
	7+7+7+9	7	7	7	9	-	2.27	2.27	2.27	2.95	-	4.10	9.76	13.08	1.24	3.10	4.51	3.15	B
	7+7+7+12	7	7	7	12	-	2.19	2.19	2.19	3.50	-	4.23	10.06	13.17	1.29	3.22	4.59	3.12	B
	7+7+7+18	7	7	7	18	-	1.88	1.88	1.88	4.97	-	4.45	10.60	12.16	1.37	3.42	4.27	3.10	B
	7+7+7+24	7	7	7	24	-	1.84	1.84	1.84	6.43	-	5.01	11.94	13.69	1.57	3.91	4.89	3.05	B
	7+7+9+9	7	7	9	9	-	2.19	2.19	2.84	2.84	-	4.23	10.06	13.17	1.29	3.22	4.59	3.12	B
	7+7+9+12	7	7	9	12	-	2.11	2.11	2.75	3.38	-	4.35	10.36	13.27	1.35	3.36	4.69	3.08	B
	7+7+9+18	7	7	9	18	-	1.86	1.86	2.42	4.93	-	4.65	11.07	12.70	1.45	3.62	4.52	3.06	B
	7+7+9+24	7	7	9	24	-	1.82	1.82	2.37	6.39	-	5.21	12.41	14.22	1.64	4.11	5.13	3.02	B
	7+7+12+12	7	7	12	12	-	1.90	1.90	3.04	3.04	-	4.15	9.89	11.35	1.41	3.52	4.43	2.81	C
	7+7+12+18	7	7	12	18	-	1.85	1.85	2.96	4.89	-	4.85	11.54	13.24	1.53	3.82	4.78	3.02	B
	7+7+12+24	7	7	12	24	-	1.77	1.77	2.83	6.20	-	5.28	12.57	13.94	1.69	4.22	5.11	2.98	C
	7+7+18+18	7	7	18	18	-	1.75	1.75	4.63	4.63	-	5.36	12.77	14.01	1.76	4.40	5.29	2.90	C
	7+9+9+9	7	9	9	9	-	2.11	2.75	2.75	2.75	-	4.35	10.36	13.27	1.35	3.36	4.69	3.08	B
	7+9+9+12	7	9	9	12	-	1.90	2.47	2.47	3.04	-	4.15	9.89	11.35	1.41	3.52	4.43	2.81	C
	7+9+9+18	7	9	9	18	-	1.85	2.40	2.40	4.89	-	4.85	11.54	13.24	1.53	3.82	4.78	3.02	B
	7+9+9+24	7	9	9	24	-	1.77	2.30	2.30	6.20	-	5.28	12.57	13.94	1.69	4.22	5.11	2.98	C
	7+9+12+12	7	9	12	12	-	1.88	2.45	3.01	3.01	-	4.35	10.36	11.89	1.35	3.39	4.23	3.06	B
	7+9+12+18	7	9	12	18	-	1.83	2.38	2.94	4.86	-	5.05	12.02	13.78	1.59	3.97	4.96	3.03	B
	7+9+12+24	7	9	12	24	-	1.74	2.26	2.78	6.09	-	5.40	12.87	14.04	1.77	4.44	5.30	2.90	C
	7+9+18+18	7	9	18	18	-	1.72	2.24	4.56	4.56	-	5.49	13.07	14.10	1.82	4.54	5.36	2.88	C
	7+12+12+12	7	12	12	12	-	1.87	2.99	2.99	2.99	-	4.55	10.83	12.43	1.41	3.53	4.41	3.07	B
	7+12+12+18	7	12	12	18	-	1.80	2.88	2.88	4.76	-	5.17	12.32	13.87	1.63	4.08	5.01	3.02	B
	7+12+18+18	7	12	12	24	-	1.71	2.74	2.74	5.99	-	5.53	13.17	14.13	1.83	4.57	5.37	2.88	C
	9+9+9+9	9	9	9	9	-	2.47	2.47	2.47	2.47	-	4.15	9.89	11.35	1.29	3.22	4.03	3.07	B
	9+9+9+12	9	9	9	12	-	2.45	2.45	2.45	3.01	-	4.35	10.36	11.89	1.35	3.39	4.23	3.06	B
	9+9+9+18	9	9	9	18	-	2.38	2.38	2.38	4.86	-	5.05	12.02	13.78	1.59	3.97	4.96	3.03	B
	9+9+9+24	9	9	9	24	-	2.26	2.26	2.26	6.09	-	5.40	12.87	14.04	1.77	4.44	5.30	2.90	C
	9+9+12+12	9	9	12	12	-	2.43	2.43	2.99	2.99	-	4.55	10.83	12.43	1.41	3.53	4.41	3.07	B
	9+9+12+18	9	9	12	18	-	2.34	2.34	2.88	4.76	-	5.17	12.32	13.87	1.63	4.08	5.01	3.02	B
	9+9+12+24	9	9	12	24	-	2.22	2.22	2.74	5.99	-	5.53	13.17	14.13	1.83	4.57	5.37	2.88	C
	9+12+12+12	9	12	12	12	-	2.41	2.97	2.97	2.97	-	4.75	11.31	12.97	1.49	3.73	4.66	3.03	B
9+12+12+18	9	12	12	18	-	2.29	2.82	2.82	4.68	-	5.30	12.62	13.96	1.73	4.32	5.23	2.92	C	
12+12+12+12	12	12	12	12	-	2.94	2.94	2.94	2.94	-	4.95	11.78	13.51	1.57	3.91	4.89	3.01	B	
12+12+12+18	12	12	12	18	-	2.77	2.77	2.77	4.59	-	5.43	12.92	14.05	1.78	4.45	5.30	2.90	C	

To be continued

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU5E42YEEBMHO-X

COOLING

Continued

Comb.	Indoor Units	Combinations (x1000 Btu/h)					Rated Capacity (kW)(Nom. cooling)					Total Cooling Capacity (kW)			Total Power Input (kW)			EER (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 5	7+7+7+7+7	7	7	7	7	7	2.11	2.11	2.11	2.11	2.11	4.43	10.55	11.61	1.40	3.49	4.43	3.02	B
	7+7+7+7+9	7	7	7	7	9	2.07	2.07	2.07	2.07	2.69	4.61	10.97	14.26	1.43	3.59	5.36	3.06	B
	7+7+7+7+12	7	7	7	7	12	2.02	2.02	2.02	2.02	3.23	4.75	11.31	14.29	1.45	3.61	5.24	3.13	B
	7+7+7+7+18	7	7	7	7	18	1.88	1.88	1.88	1.88	4.97	5.24	12.48	14.42	1.52	3.80	5.01	3.28	A
	7+7+7+7+24	7	7	7	7	24	1.79	1.79	1.79	1.79	6.26	5.64	13.42	14.52	1.62	4.04	4.97	3.32	A
	7+7+7+9+9	7	7	7	9	9	2.02	2.02	2.02	2.62	2.62	4.75	11.31	14.29	1.45	3.61	5.24	3.13	B
	7+7+7+9+12	7	7	7	9	12	1.97	1.97	1.97	2.56	3.15	4.87	11.61	13.28	1.47	3.67	4.81	3.16	B
	7+7+7+9+18	7	7	7	9	18	1.84	1.84	1.84	2.40	4.88	5.38	12.81	14.45	1.57	3.93	5.05	3.26	A
	7+7+7+9+24	7	7	7	9	24	1.76	1.76	1.76	2.29	6.17	5.78	13.76	14.55	1.64	4.11	4.93	3.35	A
	7+7+7+12+12	7	7	7	12	12	1.93	1.93	1.93	3.09	3.09	5.02	11.96	13.84	1.49	3.74	4.94	3.20	B
	7+7+7+12+18	7	7	7	12	18	1.81	1.81	1.81	2.90	4.80	5.52	13.15	14.49	1.62	4.04	5.08	3.25	A
	7+7+7+18+18	7	7	7	18	18	1.72	1.72	1.72	4.57	4.57	6.01	14.32	14.61	1.81	4.54	5.30	3.16	B
	7+7+9+9+9	7	7	9	9	9	1.97	1.97	2.57	2.57	2.57	4.89	11.64	14.33	1.42	3.54	4.97	3.28	A
	7+7+9+9+12	7	7	9	9	12	1.93	1.93	2.51	2.51	3.09	5.03	11.98	14.36	1.50	3.74	5.13	3.20	B
	7+7+9+9+18	7	7	9	9	18	1.81	1.81	2.36	2.36	4.80	5.52	13.15	14.49	1.62	4.04	5.08	3.25	A
	7+7+9+9+24	7	7	9	9	24	1.74	1.74	2.26	2.26	6.09	5.92	14.09	14.59	1.71	4.27	5.03	3.30	A
	7+7+9+12+12	7	7	9	12	12	1.89	1.89	2.46	3.03	3.03	5.17	12.31	14.40	1.53	3.82	5.11	3.22	A
	7+7+9+12+18	7	7	9	12	18	1.79	1.79	2.32	2.86	4.73	5.66	13.48	14.53	1.65	4.13	5.08	3.26	A
	7+7+12+12+12	7	7	12	12	12	1.86	1.86	2.98	2.98	2.98	5.31	12.64	14.44	1.56	3.90	5.08	3.24	A
	7+7+12+12+18	7	7	12	12	18	1.76	1.76	2.82	2.82	4.66	5.80	13.81	14.56	1.65	4.12	4.94	3.35	A
	7+9+9+9+9	7	9	9	9	9	1.93	2.51	2.51	2.51	2.51	5.03	11.98	14.36	1.50	3.74	5.13	3.20	B
	7+9+9+9+12	7	9	9	9	12	1.89	2.46	2.46	2.46	3.03	5.17	12.31	14.40	1.53	3.82	5.11	3.22	A
	7+9+9+9+18	7	9	9	9	18	1.79	2.32	2.32	2.32	4.73	5.66	13.48	14.53	1.65	4.13	5.08	3.26	A
	7+9+9+9+24	7	9	9	9	24	1.72	2.23	2.23	2.23	6.01	6.06	14.43	14.63	1.74	4.35	5.01	3.32	A
	7+9+9+12+12	7	9	9	12	12	1.86	2.42	2.42	2.98	2.98	5.31	12.64	14.44	1.57	3.93	5.12	3.22	A
	7+9+9+12+18	7	9	9	12	18	1.76	2.29	2.29	2.82	4.66	5.80	13.81	14.56	1.70	4.25	5.11	3.25	A
	7+9+12+12+12	7	9	12	12	12	1.83	2.38	2.92	2.92	2.92	5.45	12.98	14.47	1.59	3.98	5.06	3.26	A
	7+9+12+12+18	7	9	12	12	18	1.74	2.26	2.78	2.78	4.60	5.94	14.15	14.60	1.71	4.29	5.03	3.30	A
	7+12+12+12+12	7	12	12	12	12	1.80	2.88	2.88	2.88	2.88	5.59	13.31	14.51	1.63	4.08	5.07	3.26	A
	9+9+9+9+9	9	9	9	9	9	2.46	2.46	2.46	2.46	2.46	5.17	12.31	14.40	1.53	3.82	5.11	3.22	A
	9+9+9+9+12	9	9	9	9	12	2.42	2.42	2.42	2.42	2.98	5.31	12.64	14.44	1.57	3.93	5.12	3.22	A
	9+9+9+9+18	9	9	9	9	18	2.29	2.29	2.29	2.29	4.66	5.80	13.81	14.56	1.70	4.25	5.11	3.25	A
	9+9+9+12+12	9	9	9	12	12	2.38	2.38	2.38	2.92	2.92	5.45	12.98	14.47	1.59	3.98	5.06	3.26	A
	9+9+9+12+18	9	9	9	12	18	2.26	2.26	2.26	2.78	4.60	5.94	14.15	14.60	1.72	4.30	5.05	3.29	A
	9+9+12+12+12	9	9	12	12	12	2.34	2.34	2.88	2.88	3.07	5.67	13.50	14.51	1.66	4.14	5.07	3.26	A
9+12+12+12+12	9	12	12	12	12	2.30	2.84	2.84	2.84	2.84	5.73	13.65	14.54	1.66	4.16	5.05	3.28	A	
9+12+12+12+18	9	12	12	12	18	2.25	2.75	2.75	2.75	3.70	5.96	14.20	14.60	1.73	4.33	5.07	3.28	A	
12+12+12+12+12	12	12	12	12	12	2.83	2.83	2.83	2.83	2.83	5.94	14.15	14.60	1.73	4.31	5.07	3.28	A	

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU5E42YEEBMHO-X

HEATING

Comb.	Indoor Units	Combinations (x1000 Btu/h)					Rated Capacity (kW)(Nom. heating)					Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 1	7	7	-	-	-	-	2.65	-	-	-	-	1.11	2.65	3.05	0.48	0.83	0.98	3.21	C
	9	9	-	-	-	-	2.92	-	-	-	-	1.23	2.92	3.36	0.51	0.92	1.09	3.18	D
	12	12	-	-	-	-	3.75	-	-	-	-	1.58	3.75	4.31	0.59	1.19	1.41	3.16	D
	18	18	-	-	-	-	6.00	-	-	-	-	2.52	6.00	6.90	0.77	1.92	2.28	3.12	D
	24	24	-	-	-	-	7.03	-	-	-	-	2.95	7.03	8.08	0.91	2.27	2.69	3.10	D
1 to 2	7+7	7	7	-	-	-	2.40	2.40	-	-	-	2.02	4.80	6.00	0.58	1.45	1.90	3.31	C
	7+9	7	9	-	-	-	2.34	3.04	-	-	-	2.26	5.37	6.68	0.65	1.63	2.12	3.30	C
	7+12	7	12	-	-	-	2.29	3.66	-	-	-	2.50	5.95	7.36	0.73	1.82	2.37	3.26	C
	7+18	7	18	-	-	-	2.18	5.77	-	-	-	3.34	7.95	9.74	0.99	2.47	3.17	3.22	C
	7+24	7	24	-	-	-	2.13	7.44	-	-	-	4.02	9.57	11.66	1.20	3.01	3.85	3.18	D
	9+9	9	9	-	-	-	2.97	2.97	-	-	-	2.50	5.95	7.36	0.73	1.82	2.37	3.26	C
	9+12	9	12	-	-	-	2.92	3.60	-	-	-	2.74	6.52	8.04	0.81	2.02	2.62	3.22	C
	9+18	9	18	-	-	-	2.80	5.72	-	-	-	3.58	8.52	10.42	1.07	2.66	3.42	3.20	C
	9+24	9	24	-	-	-	2.75	7.40	-	-	-	4.26	10.14	12.34	1.29	3.22	4.11	3.15	D
	12+12	12	12	-	-	-	3.55	3.55	-	-	-	2.98	7.09	8.72	0.89	2.22	2.86	3.20	C
	12+18	12	18	-	-	-	3.42	5.67	-	-	-	3.82	9.09	11.10	1.15	2.87	3.67	3.17	D
	12+24	12	24	-	-	-	3.36	7.35	-	-	-	4.50	10.72	13.02	1.37	3.41	4.36	3.14	D
18+18	18	18	-	-	-	5.55	5.55	-	-	-	4.66	11.10	13.47	1.42	3.56	4.54	3.12	D	
1 to 3	7+7+7	7	7	7	-	-	2.33	2.33	2.33	-	-	2.94	7.00	8.40	0.82	2.05	2.62	3.41	B
	7+7+9	7	7	9	-	-	2.25	2.25	2.92	-	-	3.12	7.42	8.91	0.87	2.18	2.79	3.40	B
	7+7+12	7	7	12	-	-	2.18	2.18	3.48	-	-	3.29	7.84	9.43	0.94	2.34	2.99	3.35	C
	7+7+18	7	7	18	-	-	2.00	2.00	5.30	-	-	3.91	9.30	11.22	1.13	2.82	3.62	3.30	C
	7+7+24	7	7	24	-	-	1.91	1.91	6.67	-	-	4.40	10.48	12.68	1.29	3.23	4.16	3.25	C
	7+9+9	7	9	9	-	-	2.18	2.83	2.83	-	-	3.29	7.84	9.43	0.94	2.34	2.99	3.35	C
	7+9+12	7	9	12	-	-	2.12	2.75	3.39	-	-	3.47	8.25	9.94	1.00	2.50	3.21	3.30	C
	7+9+18	7	9	18	-	-	1.96	2.55	5.20	-	-	4.08	9.72	11.74	1.19	2.98	3.84	3.26	C
	7+9+24	7	9	24	-	-	1.88	2.44	6.58	-	-	4.58	10.90	13.19	1.36	3.41	4.40	3.20	C
	7+12+12	7	12	12	-	-	2.06	3.30	3.30	-	-	3.64	8.67	10.45	1.06	2.64	3.39	3.28	C
	7+12+18	7	12	18	-	-	1.93	3.09	5.12	-	-	4.26	10.14	12.25	1.26	3.15	4.06	3.22	C
	7+12+24	7	12	24	-	-	1.86	2.97	6.49	-	-	4.75	11.32	13.70	1.41	3.54	4.57	3.20	C
	7+18+18	7	18	18	-	-	1.84	4.88	4.88	-	-	4.87	11.60	14.05	1.47	3.68	4.76	3.15	D
	9+9+9	9	9	9	-	-	2.75	2.75	2.75	-	-	3.47	8.25	9.94	1.00	2.50	3.21	3.30	C
	9+9+12	9	9	12	-	-	2.68	2.68	3.30	-	-	3.64	8.67	10.45	1.06	2.64	3.39	3.28	C
	9+9+18	9	9	18	-	-	2.51	2.51	5.12	-	-	4.26	10.14	12.25	1.26	3.15	4.06	3.22	C
	9+9+24	9	9	24	-	-	2.41	2.41	6.49	-	-	4.75	11.32	13.70	1.41	3.54	4.57	3.20	C
	9+12+12	9	12	12	-	-	2.63	3.23	3.23	-	-	3.82	9.09	10.97	1.12	2.79	3.58	3.26	C
	9+12+18	9	12	18	-	-	2.47	3.04	5.04	-	-	4.43	10.55	12.76	1.30	3.25	4.18	3.25	C
	9+12+24	9	12	24	-	-	2.38	2.93	6.42	-	-	4.93	11.74	14.22	1.49	3.73	4.82	3.15	D
9+18+18	9	18	18	-	-	2.37	4.82	4.82	-	-	5.05	12.02	14.56	1.55	3.88	5.02	3.10	D	
12+12+12	12	12	12	-	-	3.17	3.17	3.17	-	-	3.99	9.51	11.48	1.16	2.91	3.74	3.27	C	
12+12+18	12	12	18	-	-	3.00	3.00	4.97	-	-	4.61	10.97	13.28	1.37	3.43	4.43	3.20	C	
12+12+24	12	12	24	-	-	2.90	2.90	6.34	-	-	5.10	12.14	14.62	1.57	3.91	5.04	3.10	D	
12+18+18	12	18	18	-	-	2.87	4.75	4.75	-	-	5.20	12.37	14.74	1.62	4.04	5.15	3.06	D	

To be continued

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU5E42YEEMHO-X

HEATING

Continued

Comb.	Indoor Units	Combinations (x1000 Btu/h)					Rated Capacity (kW)(Nom. heating)					Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 4	7+7+7+7	7	7	7	7	-	2.25	2.25	2.25	2.25	-	3.78	9.00	10.35	1.03	2.56	3.17	3.51	B
	7+7+7+9	7	7	7	9	-	2.19	2.19	2.19	2.84	-	3.95	9.41	10.77	1.07	2.69	3.31	3.50	B
	7+7+7+12	7	7	7	12	-	2.13	2.13	2.13	3.41	-	4.12	9.81	11.19	1.13	2.82	3.46	3.48	B
	7+7+7+18	7	7	7	18	-	1.99	1.99	1.99	5.27	-	4.72	11.23	12.66	1.31	3.28	3.99	3.42	B
	7+7+7+24	7	7	7	24	-	1.90	1.90	1.90	6.67	-	5.20	12.38	13.85	1.47	3.69	4.45	3.36	C
	7+7+9+9	7	7	9	9	-	2.13	2.13	2.77	2.77	-	4.12	9.81	11.19	1.13	2.82	3.46	3.48	B
	7+7+9+12	7	7	9	12	-	2.09	2.09	2.71	3.34	-	4.29	10.22	11.61	1.18	2.96	3.63	3.45	B
	7+7+9+18	7	7	9	18	-	1.96	1.96	2.54	5.18	-	4.89	11.64	13.08	1.37	3.42	4.15	3.40	B
	7+7+9+24	7	7	9	24	-	1.87	1.87	2.43	6.54	-	5.33	12.70	14.11	1.52	3.80	4.57	3.34	C
	7+7+12+12	7	7	12	12	-	2.04	2.04	3.27	3.27	-	4.46	10.62	12.03	1.35	3.38	4.16	3.14	D
	7+7+12+18	7	7	12	18	-	1.93	1.93	3.08	5.11	-	5.06	12.04	13.50	1.44	3.60	4.35	3.35	C
	7+7+12+24	7	7	12	24	-	1.83	1.83	2.93	6.41	-	5.46	13.00	14.34	1.58	3.94	4.70	3.30	C
	7+7+18+18	7	7	18	18	-	1.81	1.81	4.79	4.79	-	5.55	13.20	14.49	1.61	4.03	4.78	3.28	C
	7+9+9+9	7	9	9	9	-	2.09	2.71	2.71	2.71	-	4.29	10.22	11.61	1.18	2.96	3.63	3.45	B
	7+9+9+12	7	9	9	12	-	2.04	2.66	2.66	3.27	-	4.46	10.62	12.03	1.25	3.12	3.81	3.41	B
	7+9+9+18	7	9	9	18	-	1.93	2.51	2.51	5.11	-	5.06	12.04	13.50	1.44	3.60	4.35	3.35	C
	7+9+9+24	7	9	9	24	-	1.83	2.38	2.38	6.41	-	5.46	13.00	14.34	1.58	3.94	4.70	3.30	C
	7+9+12+12	7	9	12	12	-	2.01	2.61	3.21	3.21	-	4.63	11.03	12.45	1.35	3.37	4.12	3.27	C
	7+9+12+18	7	9	12	18	-	1.90	2.47	3.04	5.04	-	5.23	12.45	13.92	1.54	3.85	4.67	3.23	C
	7+9+12+24	7	9	12	24	-	1.80	2.34	2.88	6.29	-	5.59	13.30	14.56	1.62	4.06	4.81	3.28	C
	7+9+18+18	7	9	18	18	-	1.78	2.31	4.71	4.71	-	5.67	13.51	14.72	1.67	4.17	4.92	3.24	C
	7+12+12+12	7	12	12	12	-	1.97	3.15	3.15	3.15	-	4.80	11.44	12.87	1.45	3.62	4.42	3.16	D
	7+12+12+18	7	12	12	18	-	1.86	2.98	2.98	4.93	-	5.36	12.75	14.15	1.56	3.89	4.67	3.28	C
	7+12+12+24	7	12	12	24	-	1.77	2.83	2.83	6.18	-	5.71	13.61	14.79	1.68	4.20	4.95	3.24	C
	9+9+9+9	9	9	9	9	-	2.66	2.66	2.66	2.66	-	4.46	10.62	12.03	1.23	3.08	3.76	3.45	B
	9+9+9+12	9	9	9	12	-	2.61	2.61	2.61	3.21	-	4.63	11.03	12.45	1.35	3.37	4.12	3.27	C
	9+9+9+18	9	9	9	18	-	2.47	2.47	2.47	5.04	-	5.23	12.45	13.92	1.53	3.82	4.62	3.26	C
	9+9+9+24	9	9	9	24	-	2.34	2.34	2.34	6.29	-	5.59	13.30	14.56	1.64	4.11	4.87	3.24	C
	9+9+12+12	9	9	12	12	-	2.56	2.56	3.15	3.15	-	4.80	11.44	12.87	1.45	3.62	4.42	3.16	D
	9+9+12+18	9	9	12	18	-	2.42	2.42	2.98	4.93	-	5.36	12.75	14.15	1.56	3.89	4.67	3.28	C
	9+9+12+24	9	9	12	24	-	2.30	2.30	2.83	6.18	-	5.71	13.61	14.79	1.68	4.20	4.95	3.24	C
	9+12+12+12	9	12	12	12	-	2.52	3.11	3.11	3.11	-	4.97	11.84	13.29	1.45	3.63	4.42	3.26	C
	9+12+12+18	9	12	12	18	-	2.37	2.92	2.92	4.84	-	5.48	13.05	14.37	1.61	4.02	4.79	3.25	C
	12+12+12+12	12	12	12	12	-	3.06	3.06	3.06	3.06	-	5.14	12.25	13.71	1.50	3.76	4.55	3.26	C
	12+12+12+18	12	12	12	18	-	2.87	2.87	2.87	4.75	-	5.61	13.35	14.60	1.65	4.12	4.88	3.24	C

MULTI SPLIT INVERTER 50HZ R-410A

Multi DC Inverter Combination Table

YU5E42YEIBMHO-X

HEATING

Continued

Comb.	Indoor Units	Combinations (x1000 Btu/h)					Rated Capacity (kW)(Nom. heating)					Total Heating Capacity (kW)			Total Power Input (kW)			COP (W/W)	Energy Class
		Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.		
1 to 5	7+7+7+7+7	7	7	7	7	7	2.17	2.17	2.17	2.17	2.17	4.55	10.84	11.87	1.23	3.08	3.80	3.52	B
	7+7+7+7+9	7	7	7	7	9	2.10	2.10	2.10	2.10	2.73	4.68	11.14	12.58	1.26	3.16	4.02	3.53	B
	7+7+7+7+12	7	7	7	7	12	2.04	2.04	2.04	2.04	3.27	4.80	11.43	13.28	1.28	3.21	4.20	3.56	B
	7+7+7+7+18	7	7	7	7	18	1.89	1.89	1.89	1.89	5.00	5.27	12.54	15.41	1.37	3.44	4.74	3.65	A
	7+7+7+7+24	7	7	7	7	24	1.85	1.85	1.85	1.85	6.46	5.81	13.84	15.46	1.50	3.74	4.69	3.70	A
	7+7+7+9+9	7	7	7	9	9	2.04	2.04	2.04	2.65	2.65	4.80	11.43	13.28	1.28	3.21	4.20	3.56	B
	7+7+7+9+12	7	7	7	9	12	1.99	1.99	1.99	2.58	3.18	4.92	11.72	13.99	1.31	3.27	4.40	3.58	B
	7+7+7+9+18	7	7	7	9	18	1.87	1.87	1.87	2.43	4.96	5.46	13.00	15.43	1.42	3.55	4.73	3.66	A
	7+7+7+9+24	7	7	7	9	24	1.83	1.83	1.83	2.38	6.42	6.01	14.30	15.48	1.55	3.88	4.71	3.69	A
	7+7+7+12+12	7	7	7	12	12	1.94	1.94	1.94	3.10	3.10	5.05	12.02	14.69	1.33	3.32	4.56	3.62	A
	7+7+7+12+18	7	7	7	12	18	1.86	1.86	1.86	2.97	4.92	5.65	13.46	15.45	1.46	3.66	4.71	3.68	A
	7+7+7+18+18	7	7	7	18	18	1.82	1.82	1.82	4.81	4.81	6.33	15.07	15.51	1.63	4.07	4.70	3.70	A
	7+7+9+9+9	7	7	9	9	9	1.99	1.99	2.58	2.58	2.58	4.92	11.72	13.99	1.31	3.27	4.40	3.58	B
	7+7+9+9+12	7	7	9	9	12	1.94	1.94	2.52	2.52	3.10	5.05	12.02	14.69	1.33	3.32	4.56	3.62	A
	7+7+9+9+18	7	7	9	9	18	1.86	1.86	2.41	2.41	4.92	5.65	13.46	15.45	1.46	3.66	4.71	3.68	A
	7+7+9+9+24	7	7	9	9	24	1.82	1.82	2.37	2.37	6.38	6.20	14.76	15.50	1.59	3.97	4.67	3.72	A
	7+7+9+12+12	7	7	9	12	12	1.89	1.89	2.46	3.03	3.03	5.17	12.31	15.40	1.35	3.37	4.74	3.65	A
	7+7+9+12+18	7	7	9	12	18	1.84	1.84	2.40	2.95	4.89	5.85	13.92	15.47	1.51	3.78	4.71	3.68	A
	7+7+12+12+12	7	7	12	12	12	1.88	1.88	3.00	3.00	3.00	5.36	12.77	15.42	1.39	3.48	4.72	3.67	A
	7+7+12+12+18	7	7	12	12	18	1.83	1.83	2.93	2.93	4.85	6.04	14.38	15.48	1.39	3.89	4.69	3.70	A
	7+9+9+9+9	7	9	9	9	9	1.94	2.52	2.52	2.52	2.52	5.05	12.02	14.69	1.33	3.32	4.56	3.62	A
	7+9+9+9+12	7	9	9	9	12	1.89	2.46	2.46	2.46	3.03	5.17	12.31	15.40	1.35	3.37	4.74	3.65	A
	7+9+9+9+18	7	9	9	9	18	1.84	2.40	2.40	2.40	4.89	5.85	13.92	15.47	1.52	3.80	4.74	3.66	A
	7+9+9+9+24	7	9	9	9	24	1.81	2.36	2.36	2.36	6.02	6.26	14.90	15.60	1.63	4.08	4.80	3.65	A
	7+9+9+12+12	7	9	9	12	12	1.88	2.44	2.44	3.00	3.00	5.36	12.77	15.42	1.39	3.48	4.72	3.67	A
	7+9+9+12+18	7	9	9	12	18	1.83	2.38	2.38	2.93	4.85	6.04	14.38	15.48	1.55	3.89	4.69	3.70	A
	7+9+12+12+12	7	9	12	12	12	1.86	2.42	2.98	2.98	2.98	5.56	13.23	15.44	1.44	3.60	4.71	3.68	A
	7+9+12+12+18	7	9	12	12	18	1.82	2.37	2.91	2.91	4.83	6.23	14.84	15.50	1.60	3.99	4.67	3.72	A
	7+12+12+12+12	7	12	12	12	12	1.85	2.96	2.96	2.96	2.96	5.75	13.69	15.46	1.48	3.71	4.70	3.69	A
	9+9+9+9+9	9	9	9	9	9	2.46	2.46	2.46	2.46	2.46	5.17	12.31	15.40	1.35	3.37	4.74	3.65	A
	9+9+9+9+12	9	9	9	9	12	2.44	2.44	2.44	2.44	3.00	5.36	12.77	15.42	1.39	3.48	4.72	3.67	A
	9+9+9+9+18	9	9	9	9	18	2.38	2.38	2.38	2.38	4.85	6.04	14.38	15.48	1.55	3.89	4.69	3.70	A
	9+9+9+12+12	9	9	9	12	12	2.42	2.42	2.42	2.98	2.98	5.56	13.23	15.44	1.44	3.60	4.71	3.68	A
	9+9+9+12+18	9	9	9	12	18	2.37	2.37	2.37	2.91	4.83	6.23	14.84	15.50	1.60	3.99	4.67	3.72	A
	9+9+12+12+12	9	9	12	12	12	2.41	2.41	2.96	2.96	2.96	5.75	13.69	15.46	1.48	3.71	4.70	3.69	A
	9+12+12+12+12	9	12	12	12	12	2.39	2.94	2.94	2.94	2.94	5.94	14.15	15.47	1.53	3.82	4.69	3.70	A
9+12+12+12+18	9	12	12	12	18	2.30	2.86	2.86	2.86	4.07	6.28	14.95	15.60	1.62	4.04	4.73	3.70	A	
12+12+12+12+12	12	12	12	12	12	2.98	2.98	2.98	2.98	2.98	6.26	14.90	15.60	1.60	4.01	4.70	3.72	A	



INSTALL CONFIDENCE

Johnson Controls, the Johnson Controls logo, YORK are registered trademarks of Johnson Controls, Inc in the United States of America and other countries. Other trademarks used herein may be trademarks or registered trademarks of other companies.

FOR MORE INFORMATION CONTACT JOHNSONCONTROLS.COM

© 2021 Johnson Controls, Inc, P.O. Box 423, Milwaukee, WI 53201, All rights reserved worldwide.

PUBL-2355(0921)A

