


# ROOFTOP

Frío - Calor por Gas



**Sunline**  
S E R I E S

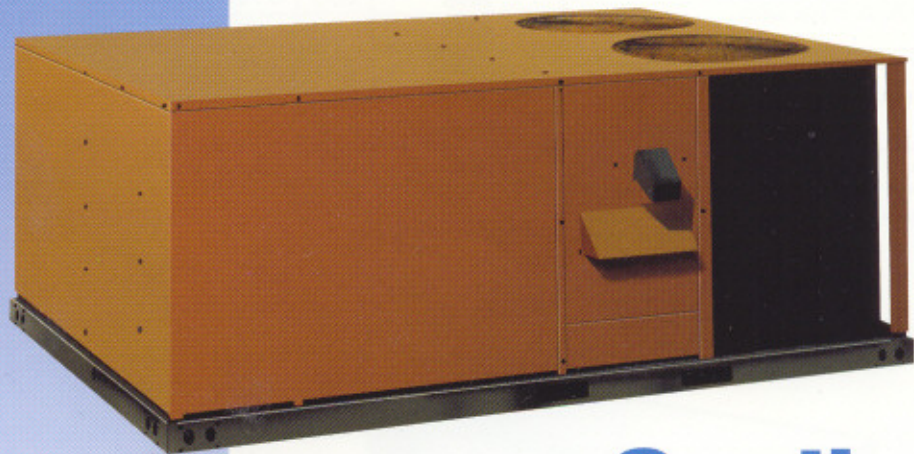

**PREDATOR**<sup>TM</sup>  
S E R I E S



 **York**<sup>®</sup>




**ROOFTOP FRIO - CALOR POR GAS**  
Especificaciones técnicas

| Modelos                  |       |              | D*CG         |        |        |        | D*MN   |        |        | D*CG         |        |        |
|--------------------------|-------|--------------|--------------|--------|--------|--------|--------|--------|--------|--------------|--------|--------|
|                          |       |              | 036          | 048    | 060    | 076    | 090    | 120    | 150    | 180          | 240    | 300    |
| Capacidades*             | Frío  | TR (Ton.)    | 3,2          | 4,1    | 5,2    | 6,3    | 7,7    | 10,2   | 11,7   | 14,4         | 19,1   | 25,9   |
|                          |       | kcal/h       | 9.680        | 12.403 | 15.730 | 19.058 | 23.293 | 30.855 | 35.393 | 43.560       | 57.778 | 78.348 |
|                          | Calor | kcal/h       | 10.058       | 15.125 | 19.864 | 19.864 | 30.250 | 45.375 | 45.375 | 60.500       | 60.500 | 60.500 |
| Compresor                |       | Tipo         | Reciprocante |        |        |        |        |        | Scroll | Reciprocante | Scroll |        |
|                          |       | Cantidad     | 1            | 1      | 1      | 1      | 2      | 2      | 2      | 2            | 2      | 2      |
| Refrigerante             |       |              | R22          |        |        |        |        |        |        |              |        |        |
| Número de Circuitos      |       |              | 1            | 1      | 1      | 1      | 2      | 2      | 2      | 2            | 2      | 2      |
| Alimentación             |       | Volt/Fase/Hz | 380-415/3/50 |        |        |        |        |        |        |              |        |        |
| Intensidad nominal       |       | A            | 7,38         | 9,05   | 12,42  | 15,96  | 18,27  | 23,83  | 24,53  | 34,14        | 45,04  | 62,38  |
| Caudal de Aire Inyección |       | m³/s         | 0,55         | 0,75   | 0,95   | 1,15   | 1,42   | 1,89   | 2,36   | 2,8          | 3,8    | 4,25   |
|                          |       | CFM          | 1.165        | 1.589  | 2.013  | 2.437  | 3.009  | 4.005  | 5.001  | 5.933        | 8.052  | 9.006  |
| Dimensiones              |       | H(mm)        | 829          | 829    | 829    | 829    | 1.290  | 1.290  | 1.290  | 1.235        | 1.337  | 1.337  |
|                          |       | L(mm)        | 2.089        | 2.089  | 2.089  | 2.089  | 2.260  | 2.260  | 2.260  | 3.181        | 2.337  | 3.461  |
|                          |       | P(mm)        | 1.140        | 1.140  | 1.140  | 1.140  | 1.500  | 1.500  | 1.500  | 3.461        | 2.337  | 2.337  |
| Peso Neto                |       | kg           | 250          | 268    | 286    | 313    | 490,6  | 518,6  | 545,3  | 866          | 957    | 1.238  |

\*Capacidades basadas en: Temperatura Exterior: 35°C

Temperatura aire al evaporador: 26,6°C DB - 19,4°C WB

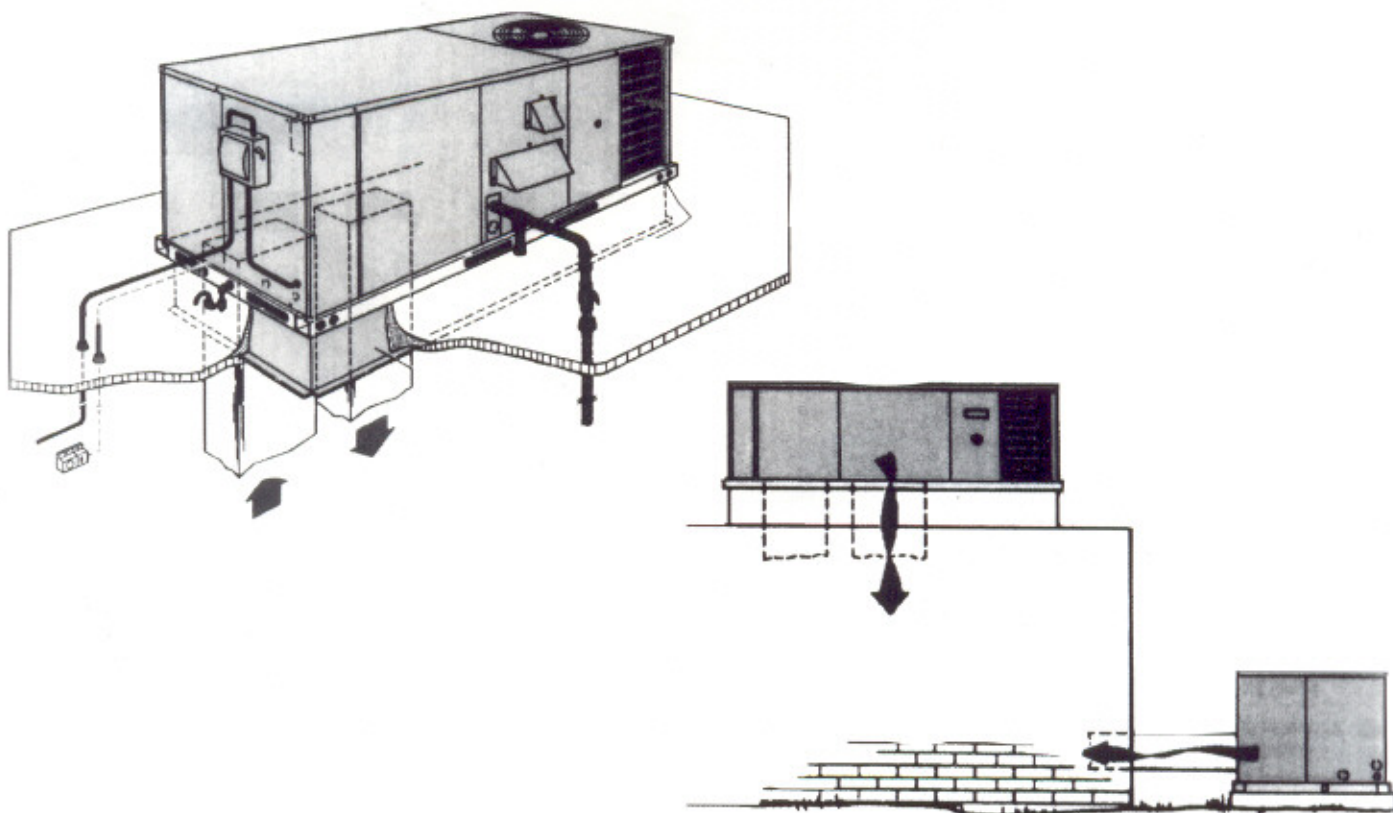

YORK INTERNATIONAL

E - COM - R9403

El fabricante se reserva el derecho de proceder a cualquier modificación sin previo aviso.