


ROOFTOP

Frío Sólo



Sunline
S E R I E S

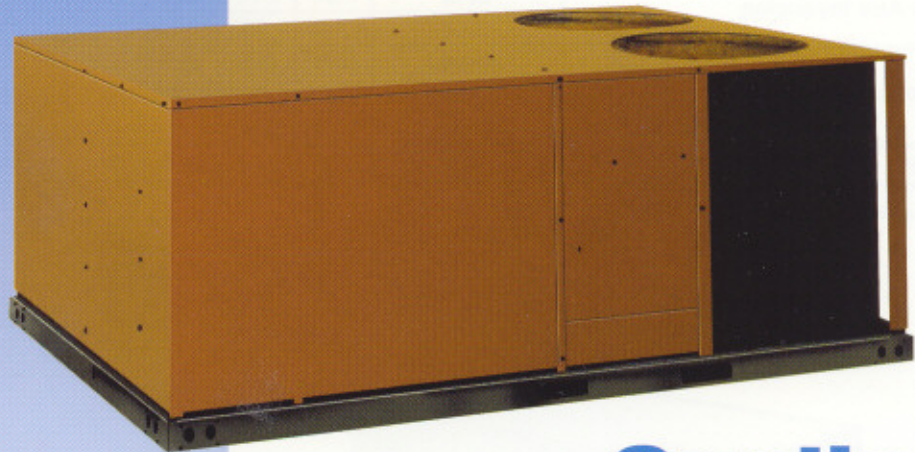

PREDATOR[™]
S E R I E S



 **York**[®]

ROOFTOP FRIO SOLO
Especificaciones técnicas

Modelos			D°CE				D°M°C			D°CE		
			036	048	060	076	090	120	150	180	240	300
Capacidades*	Frío	TR (Ton.)	3,2	4,1	5,2	6,3	7,7	10,2	11,7	14,4	19,1	25,9
		kcal/h	9.680	12.403	15.730	19.058	23.293	30.855	35.393	43.560	57.777,5	78.347,5
	Calor	kcal/h	-	-	-	-	-	-	-	-	-	-
Compresor		Tipo	Reciprocante					Scroll		Reciprocante	Scroll	
		Cantidad	1	1	1	1	2	2	2	2	2	2
Refrigerante			R22									
Número de Circuitos			1	1	1	1	2	2	2	2	2	2
Alimentación		Volt/Fase/Hz	380-415/3/50									
Intensidad nominal		A	7,38	9,05	12,42	15,96	18,27	23,83	24,53	34,14	45,04	62,38
Caudal de Aire Inyección		m³/s	0,55	0,75	0,95	1,15	1,42	1,89	2,36	2,8	3,8	4,25
		CFM	1.165	1.589	2.013	2.437	3.009	4.005	5.001	5.933	8.052	9.006
Dimensiones		H(mm)	829	829	829	829	1.290	1.290	1.290	1.235	1.337	1.337
		L(mm)	2.089	2.089	2.089	2.089	2.260	2.260	2.260	3.181	2.337	3.461
		P(mm)	1.140	1.140	1.140	1.140	1.500	1.500	1.500	3.461	2.337	2.337
Peso Neto		kg	250	268	286	313	490,6	518,6	545,3	866	957	1.238

*Capacidades basadas en: Temperatura Exterior: 35°C
Temperatura aire al evaporador: 26,6°C DB - 19,4°C WB

